

Braskem

FPT300F

Homopolymer Polypropylene

- Good Mold Release, Excellent Part Finish (Low Bloom)
- Suggested Uses Include Housewares, Caps and Closures, Mugs / Cups, Thin-Walled Containers

Property	Units	Typical Value	Test Method
Nominal Melt Flow Rate (230°C/2.16kg)	g/10 min	30	ASTM D1238
Tensile Strength at Yield (2 in/min, 50 mm/min)	psi MPa	4,800 33	ASTM D638
Elongation at Yield (2 in/min, 50 mm/min)	%	10	ASTM D638
Flexural Modulus (0.05 in/min, 1.3 mm/min, 1% secant)	psi MPa	200,000 1,379	ASTM D790A
Notched Izod Impact Strength at 23°C	ft-lbs/in J/m	0.7 37	ASTM D256A
Rockwell Hardness	R	104	ASTM D786

Information contained herein is considered accurate to our best knowledge. It is offered for your consideration and investigation, and is not to be construed as a representation or warranty, expressed or implied, for which Braskem assumes legal responsibility. Our warranties are limited to those expressly stated in formal contracts or in conditions of sale on our invoices and order acceptances. Conditions and methods of use vary and are beyond the control of Braskem. Braskem, therefore, disclaims any liability incurred as a result of the use of its products in accordance with the data contained herein. No information herein shall be construed as an offer of indemnity for infringement or as a recommendation to use these products in such a manner as to infringe any patent, domestic or foreign.

For cautions and other information relating to handling of
and exposure to this product, please see material safety
data sheet code number C4001 published by Braskem.

650 Technology Drive
Pittsburgh, PA 15210
1-800-223-8871

Revision Date: Monday,
March 23, 2009
www.braskem.com



MOLD-RITE PLASTICS LLC.
 1 Plant Street P.O. Box 160
 Plattsburgh NY 12901
 (518)561-1812
<https://www.mrpcap.com>

Product Data Sheet

MRPWH01 White

Product Description

This specification designated by Mold-Rite Plastics covers all colorants that meet the typical value data listed below.

Regulatory Compliance

FDA – Title 21 CFR Section 170-199 for Food & Drug Contact
 RoHS Compliant
 CONEG/Heavy Metal Compliant
 Proposition 65 Compliant

Typical Properties	Typical Value
Density	.90
Melt Index	30
Pellets	Standard
Recommended Let Down Ratio	50:1
Carrier Resin	PP
Estimated Heat Stability	450-500 °F
Visual Evaluation	Excellent
Additives	None
DE Tolerance	< 2.00

For further regulatory information, contact Mold-Rite Plastics customer service or sales department.

Notes: These are typical properties not to be construed as specifications. Mold-Rite Plastics reserves that right to include any other colorant that meets that above data values and regulatory requirements.

This product data sheet covers multiple colorant formulations that meet the above typical data values and regulatory requirements. All listed formulas have similar physical, chemical and processing properties. Listed known formulas; Polymer Concentrates – 10536, Penn Color 60W5221

All results were obtained from manufacturer product data sheets (where applicable). The data are intended as a general guide only and do not necessarily represent results that may be obtained elsewhere. The use of Mold-Rite Plastics products must be guided by the users own methods for selection of proper formulation. Mold-Rite Plastics disclaims any responsibility for misuse or miss application of its products. Mold-Rite Plastics liability and customer's exclusive remedy for any claims arising out of sales of its products are expressly limited at customer option for replacement not to exceed the purchase price plus transportation charges thereon in respect to any material which damage is claimed.



PRODUCT DATA SHEET

PRESSURE SEAL

MRP Description - (022)PS22:020 PLAIN

PRODUCT DESCRIPTION

Description: A polystyrene foam coated with a pressure sensitive coating.

FDA Status: Complies with Federal Regulations of H.E.W., FDA, Sections 175.125, 175.300, 177.1640, 178.3010, and 178.3710. It is entered in SANCAP's food master file FMF 166 and drug file DMF 2518.

PHYSICAL AND CHEMICAL PROPERTIES

1. Color	White - Plain or Printed
2. Thickness, mils	
(a) Overall	20.0 - 25.0
(b) Wax	2.0 - 3.0
(c) Foam	18.0 - 22.0
3. Basis Wt. Lbs./Ream 3000 ft ²	
(a) Overall	92.46 - 120.12
(b) Wax	26.46 - 30.12
(c) Foam	67.00 - 82.00
4. Gas Transmission: cc/cm ² /24hrs/1atm	
(a) Oxygen	100.68
5. Water Vapor Transmission	
(a) gm/cm ² /24hrs/100°F/90%RH	0.27
6. Melting Point of	170 - 180
7. Softening Point of	148 - 162

RECOMMENDED STORAGE CONDITIONS

The material should be stored in well-ventilated area (temp. 60° - 80°F.; RH - 40% - 60%). Material and lined closures are heat and pressure sensitive. Storage or shipping temperatures should not be in excess of 105°F. Blocking may result. If material becomes chilled, it should be stored under the recommended conditions until stabilized. Avoid storing closure liner materials over 60 days.

SUGGESTED PRODUCT USES

Material is a styrene foam inner seal coated with a torque activated coating. It has adhesion to glass and plastic bottles with metal or plastic caps. Sealing properties should be checked after being sealed for 12 hours.

Dry Products
Candy

Syrup

Product applications listed above are a partial listing and do not cover all suitable applications. These are recommendations for general categories and user must test for suitability for his specific product. Not suitable for products containing oil.

The technical information and suggestions for use made herein are based on SANCAP research and experience and are believed to be reliable, but such information and suggestions do not constitute a warranty, and no patent liability can be assumed. Since SANCAP has no control over the conditions under which the product is transported, stored, handled, used or applied, buyer must determine for himself, by preliminary tests or otherwise, the suitability of the product for his purposes. All products are sold subject to SANCAP's written warranty, which is in lieu of all other warranties or merchantability and fitness for a particular purpose. SANCAP's liability on any basis is limited to the price of the product used.



SPD Rev. 4 (02)

File: Pressure Seal
11/05/03

16125 Armour St. N.E. Alliance, Ohio 44601 330-821-1166 Fax: 330-821-0364 Toll Free: 800-966-7262

REVISIONS

REV.	DATE	APPROVAL	DESCRIPTION
1	1-20-59	E.A.	1.752
2	11-07-52	S.S.	3.90

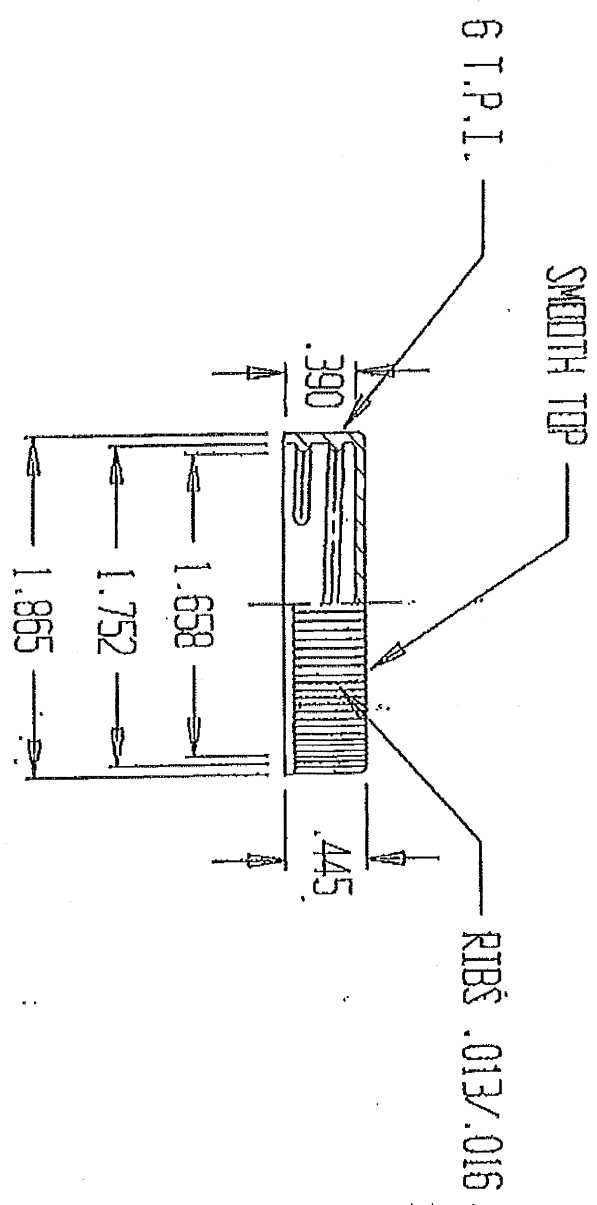

REV.	DATE	APPROVAL	DESCRIPTION
1	1-20-59	E.A.	1.752
2	11-07-52	S.S.	3.90

MATERIAL: POLYPROPYLENE

WEIGHT: 3.9 Grams (+/- 1.5 grams)

RS 45M.M./400 CAP

MOLD-RITE PLASTICS INC.
PLATTSBURGH, NEW YORK

TOLERANCE: +/- .010 DRAWN BY: P.D.T.

SCALE: FULL DATE: 1-20-59 DRAWING NO. C-3010