


PRODUCT DATA SHEET

PressureSeal 20

- PressureSeal 20 is an inner seal with a construction of polystyrene foam coated with pressure sensitive adhesive.
- The US FDA does not consider liners applied with pressure sensitive adhesive to be an effective tamper-resistant feature.
- Recommended for use with dry products.
- Available with standard or custom print.

Typical Product Attributes

Construction

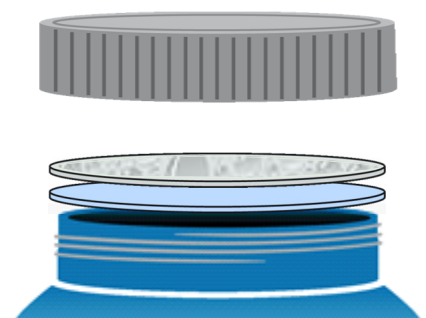Polystyrene Foam Pressure Sensitive Adhesive		SI (µm)	US (Mils)
		508,0 50,8 – 76,2	20.0 2.0 – 3.0
Thickness Tolerance		± 10%	± 10%
Minimum Width		25,4 mm	1.0 in
Width Tolerance		± 1,6 mm	± 0.0625 in

Properties

Oxygen Transmission (O ₂ TR)	Not Tested
Water Vapor Transmission (WVTR)	Not Tested

Regulatory Compliance

FDA Compliance	21 CFR 177.1640 Polystyrene and rubber-modified polystyrene.
Drug Master File (DMF)	21 CFR 177.1210 Closures with sealing gaskets for food containers.
Other Compliances	21 CFR 175.125 Pressure-sensitive adhesives.
Safety Data Sheet (SDS) Statement	002518 USFDA Food Allergen Guidelines California Proposition 65 Labeling Requirements Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11 Safety Data Sheets (SDS) are not required for articles as defined in 29 CFR 1910.1200, the OSHA Hazard Communication Standard (HazCom). This product is an article as defined by HazCom and is not considered to be, or to contain, a hazardous chemical based on evaluations made by our company.


Please note that construction does not reflect adhesive or resin bonding layers, if present.

Revision Number: 4
Revised Date: 2018-06-08


DISCLAIMER: This information is believed to be accurate at the time of printing and is subject to change without notice. Providing this information does not convey any licenses under any patent rights or intellectual property rights of Tri-Seal or others. TRI-SEAL MAKES NO WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THIS INFORMATION AND DISCLAIMS ALL LIABILITY FROM RELIANCE ON IT. Tri-Seal's only warranties for this product are those written warranties as may be agreed to by Tri-Seal and its customers. TRI-SEAL SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.

REVISIONS

REV.	DATE	APPROVAL	DESCRIPTION



PICTORIAL DESIGN
.022 HIGH

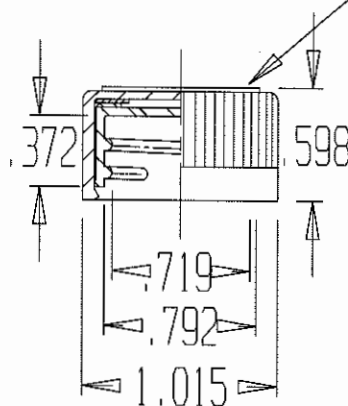

UNCONTROLLED

"T"	"E"	"H"	"A"	"B"
.792	.719	.372	1.015	.598
MATERIAL: POLYPROPYLENE				
WEIGHT: 2.6 +/- 1.0 "AVERAGE"				

CRC - 20mm Assembled Cap

MOLD-RITE PLASTICS INC.
PLATTSBURGH, NEW YORK

TOLERANCE: +/- .010	DRAWN BY: P.D.T.
SCALE: FULL	DATE: 3-3-03
DRAWING NO. PIC-20-0	