

# 70-400 CT

**Smooth Side Wall**  
**Smooth Top**  
**Continuous Thread**  
**70mm Diameter**  
**400 Thread Profile**  
**Lined or Unlined**



## OPTIONS

- Available in standard or custom colors
- Low minimum order quantities, safety stock program available
- High speed lining capabilities with a variety of lining materials including heat induction, foam and pressure sensitive
- Round or tri-tab easy-open liners
- Industry's best lead times

## SHIPPING INFORMATION

- Carton quantity: 1,000
- Carton packing: Tumble
- Pallet quantity: 30,000
- Truckload quantity: 900,000
- Carton weight (lbs): 17.4
- Pallet weight (lbs): 505
- Carton size: 24x16x14"
- Pallet size: 40x48x91"
- Freight class: 150

## STANDARD OR CUSTOM COLORS



RED  
PMS 185



ORANGE  
PMS 1665



YELLOW  
PMS 110



GOLD  
PMS 871



GREEN  
PMS 2418



GREEN  
PMS 3435



BLUE  
PMS 662



BLUE  
PMS 285



PURPLE  
PMS 2685



SILVER  
PMS 10388




BLACK



WHITE

# 70-400 CT

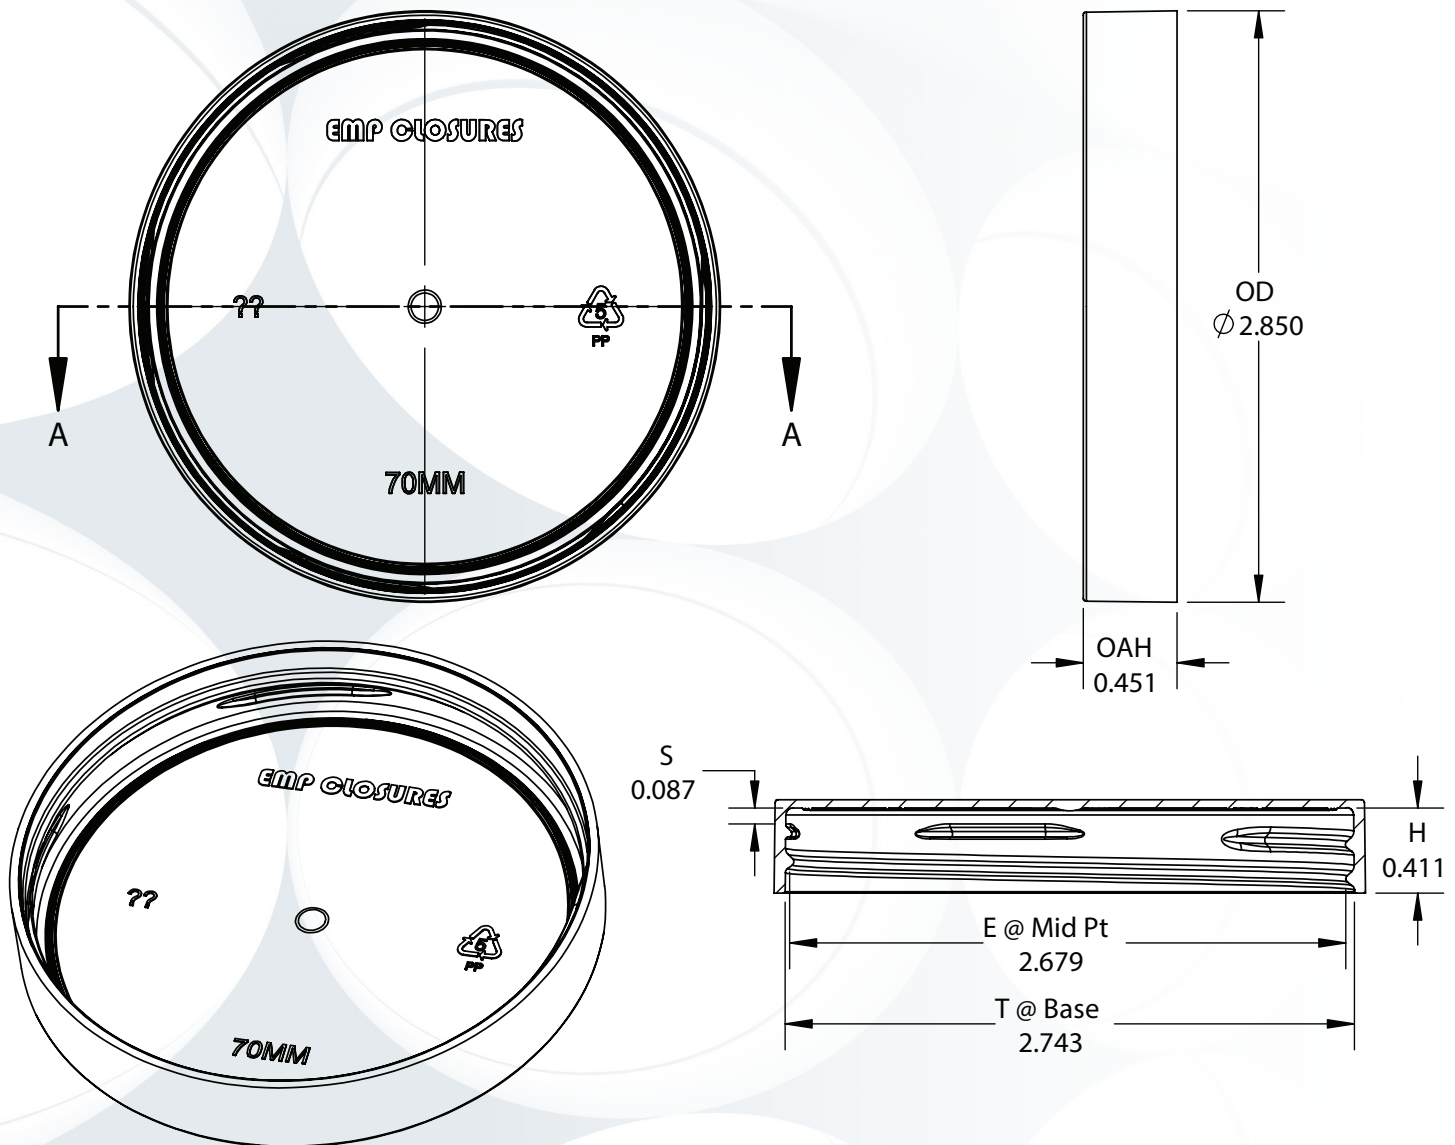

- Country of Origin is the USA and Manufacturing location is Erie, PA
- To maintain the quality of this product, it is recommended that product should be stored in its original packaging; away from any source of local heating and humidity; away from direct sunlight; under 30°C and dry conditions. It is recommended to allow product to reach operating temperature 24 hours before use.
- Products must be used within 12 months from the production date. Stocks should be in rotation so that first delivery is used first and last delivery is used last.

Inch tolerances (unless specified) General: +/- .010 " / "	6020 West Ridge Road Erie, Pennsylvania 16506 (814) 838-7914 Fax (814) 838-7411
Number of turns: 1.125	
Pitch (TPI): 6	70-400 CT
Material: PP	Erie Molded Packaging, Inc.
This drawing is the exclusive property of Erie Molded Packaging, Inc. and may not be reproduced without the expressed written consent of Erie Molded Packaging, Inc.	Date: February 7, 2022 Sheet: 01 of 01



Freshness and Protection  
for Today's Packaging

# Uni-Foam<sup>TM</sup> Technical Data Sheet

PS-113

Revision: PS-113-01312012

Product	PS-113		
Scope	One piece uniform PS foam coated on one side with a specially formulated torque-activated adhesive. (Not approved for use with wet products.)		
Composition	<b>Material</b>	<b>Standard</b>	<b>Metric</b>
	PS Foam	0.020"	0.508 mm
	Adhesive Layer	0.002"	0.051 mm
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to website	
Drug Master File (DMF): 3948		EU / EP Reg.:	
GTR Oxygen:		MVTR:	
Print Location (if any):			

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

[www.seligsealing.com](http://www.seligsealing.com)

Corporate Headquarters  
Selig Sealing Products, LLC  
342 E Wabash St  
Forrest, IL 61741, USA  
Phone: +1 (815) 785-2100  
Fax: +1 (815) 657-7584

North American Sales  
Selig Sealing Products, LLC  
2132 Deep Water Lane  
Naperville, IL 60564, USA  
Phone: +1 (630) 922-3158  
Fax: +1 (630) 922-8469

European Sales and Manufacturing  
Selig Europe 635-637 Ajax Avenue  
Slough Trading Estate  
Slough Berkshire SL14BH UK  
Phone: +44 (0) 1753 773 000  
Fax: +44 (0) 1753 773 111

Canadian Manufacturing  
Selig Canada, ULC  
145 Edward Street  
Aurora, Ontario Canada, L4G 1W3  
Phone: +1 (905) 727-0014  
Fax: +1 (905) 727-8544

Swiss Manufacturing  
ISCO Flexibles  
Bahnhofstrasse 11  
CH-8172 Niederglatt  
Phone: +41 (0) 44 851 50 50  
Fax: +41 (0) 44 851 50 51

