


- Notes:
1. Material: Polypropylene (PP)
  2. Weight: Approx 5 grams
  3. Thread: 6 TPI
  4. Printable Area on Top:  $\phi$  1.6" circle
  5. Omega Part # 7150



DIMENSION	TOLERANCE
.00	.015
.000	.010

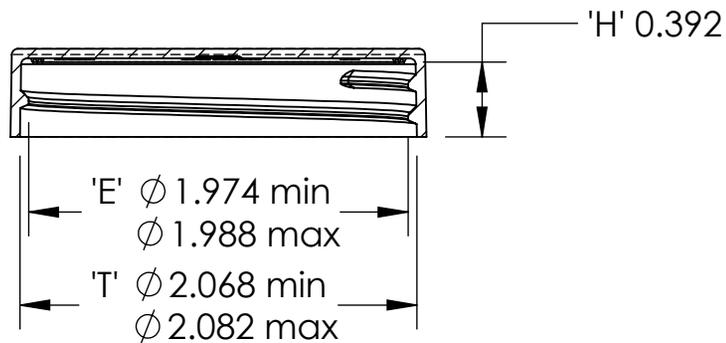

15210 Desman Rd.  
La Mirada, CA 90638  
(714) 670-6400  
omegapkg.com

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OMEGA PKG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF OMEGA PACKAGING IS PROHIBITED.

REVISION	DATE
IR	5/02/2014
EZ	12/04/2019


53mm Smooth Cap

DWG. NO.	7150-53-Smooth	SCALE	1:1
----------	----------------	-------	-----

# FoilSeal™ Technical Data Sheet

## S70A FS 5-9

Revision: FS59-09182014
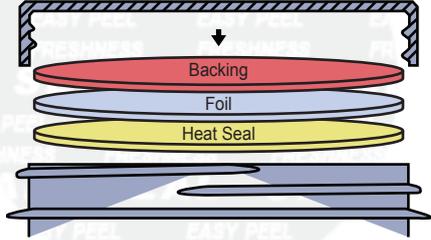
<b>Product</b>	S70A FS 5-9														
<b>Scope</b>	One piece foam backed universal heat induction foil innerseal that will seal to all container materials with varying degrees of adhesion.														
<b>Composition</b>	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>Backing</td> <td>.007"</td> <td>.1778mm</td> </tr> <tr> <td>Foil</td> <td>.001"</td> <td>.0254mm</td> </tr> <tr> <td>Heat Seal</td> <td>.001"</td> <td>.0254mm</td> </tr> </tbody> </table>	Material	Standard	Metric	Backing	.007"	.1778mm	Foil	.001"	.0254mm	Heat Seal	.001"	.0254mm		
Material	Standard	Metric													
Backing	.007"	.1778mm													
Foil	.001"	.0254mm													
Heat Seal	.001"	.0254mm													
Adhesive or resin bonding layers not shown.															
<b>FDA Status:</b> 21 CFR 177.1210	<b>Recommended Storage and Handling:</b> Refer to Website														
<b>Drug Master File (DMF):</b> #4544	<b>EU / EP Reg.:</b> Does not meet Article 3a of Reg. No. 2023/2006 and Article 3 of Reg. No. 1935/2004.														
<b>GTR Oxygen:</b> <0.0003 cc Oxygen/100 IN2 * 24hrs. @ 100°F, ASTM D3985	<b>MVTR:</b> <0.0003 gm water/100IN2 * 24 hrs. @ 75°F, ASTM F1249														
<b>Sealing to glass containers:</b> Selig can not guarantee the performance or seal integrity of this materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.															
<b>Print Location (if any):</b> Heat Seal Layer and/or Backing															

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

Recommended for use with dry food products. Is not suitable for use with fatty or alcoholic food types per ECC Reg. № 10/2011. Determining specific organoleptic compatibility per Article 3a of ECC Reg. № 2023/2006 is the responsibility of the food packager.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

www.seligsealing.com

Corporate Headquarters  
Selig Sealing Products, Inc.  
342 E Wabash St  
Forrest, IL 61741, USA  
Phone: +1 (815) 785-2100  
Fax: +1 (815) 657-7584

North American Sales  
Selig Sealing Products, Inc.  
184 Shuman Blvd., Suite 310  
Naperville, IL 60563, USA  
Phone: +1 (630) 922-3158  
Fax: +1 (630) 922-8469

European Sales and Manufacturing  
Selig UK, LTD 635-637 Ajax Avenue  
Slough Trading Estate  
Slough Berkshire SL14BH UK  
Phone: +44 (0) 1753 773 000  
Fax: +44 (0) 1753 773 111

Canadian Manufacturing  
Selig Canada, ULC  
145 Edward Street  
Aurora, Ontario Canada, L4G 1W3  
Phone: +1 (905) 727-0114  
Fax: +1 (905) 727-8544

Swiss Manufacturing  
Selig Switzerland LTD  
Bahnhofstrasse 11  
CH-8172 Niederglatt  
Phone: +41 (0) 44 851 50 50  
Fax: +41 (0) 44 851 50 51