

89-400 SM

Smooth Side Wall
Smooth Top
Continuous Thread
89mm Diameter
400 Thread Profile
Lined or Unlined



OPTIONS

- Available in standard or custom colors
- Low minimum order quantities, safety stock program available
- High speed lining capabilities with a variety of lining materials including pressure sensitive and heat induction
- Round or tri-tab easy-open liners
- Lead time 2-3 weeks

SHIPPING INFORMATION

- Carton quantity: 640
- Carton packing: Stacked
- Pallet quantity: 16,000
- Truckload quantity: 480,000
- Carton weight (lbs): 24
- Pallet weight (lbs): 620
- Carton size: 23x15x15"
- Pallet size: 40x48x81"
- Freight class: 150

STANDARD OR CUSTOM COLORS



PMS 185



PMS 3435



PMS 2747



PMS 2685




PMS 1665



PMS 10388







BLACK




WHITE

89-400 SM

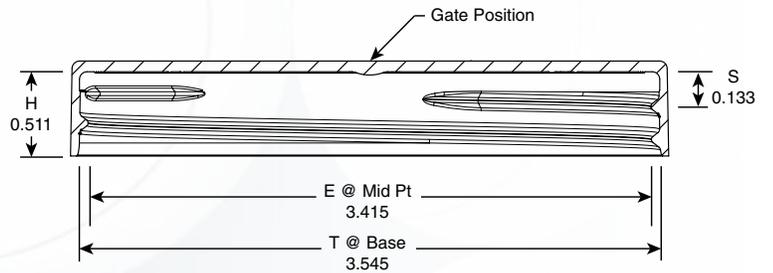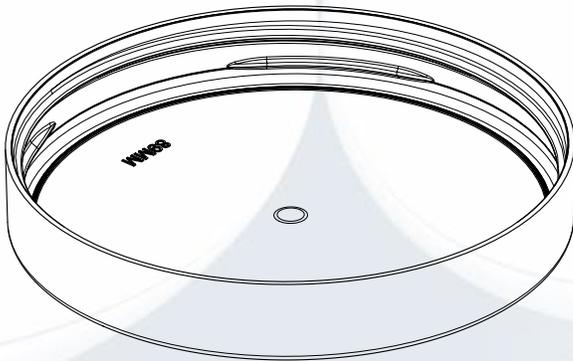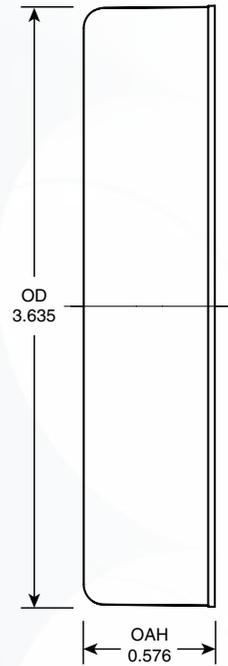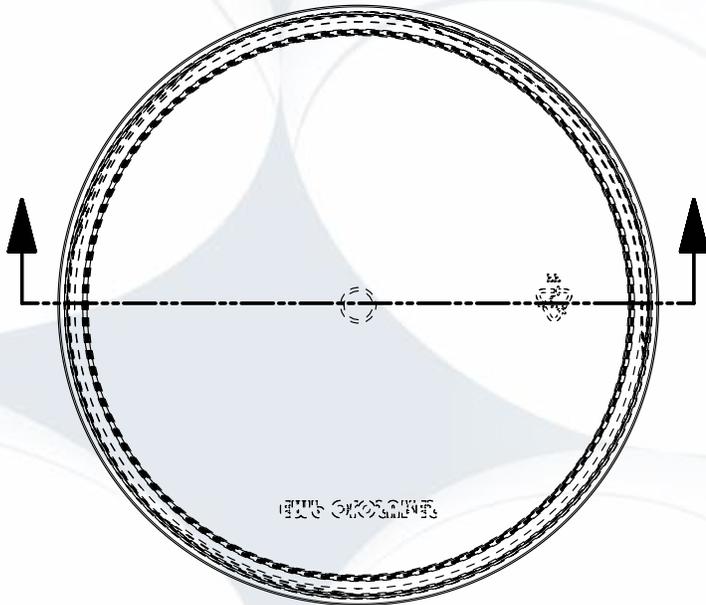

Inch tolerances (unless specified) General: +/- .010 "/>	 6020 West Ridge Road Erie, Pennsylvania 16506 (814) 838-7914 Fax (814) 838-7411	
Number of turns: 1.25		
Pitch (TPI): 5	89-400 SM	
Material: PP	Erie Molded Plastics, Inc.	
This drawing is the exclusive property of Erie Molded Plastics, Inc. and may not be reproduced without the expressed written consent of Erie Molded Plastics, Inc.	Date: November 21, 2016	Sheet: 01 of 01

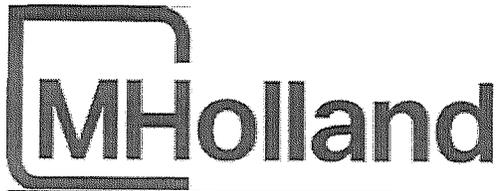

Wednesday, June 6, 2018

**MTEGRITY™ PP Homopolymer
PP510**

M. Holland Company - Polypropylene
Homopolymer

Units ▼

Action

[Legend \(Open\)](#)



General Information

General

Material Status	• Commercial: Active
Availability	• North America
Additive	• Antistatic • Nucleating Agent
Features	• Antistatic • Good Stiffness • Nucleated • Good Flow • Homopolymer
Uses	• Caps • Disposable Hospital Goods • Closures • Household Goods
Forms	• Pellets
Processing Method	• Injection Molding

ASTM & ISO Properties ¹

Physical	Nominal Value Unit	Test Method
Density	0.905 g/cm ³	ASTM D1505
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	20 g/10 min	ASTM D1238
Mechanical	Nominal Value Unit	Test Method
Tensile Strength (Yield)	38.6 MPa	ASTM D638
Flexural Modulus	1790 MPa	ASTM D790
Impact	Nominal Value Unit	Test Method
Notched Izod Impact (23°C)	32 J/m	ASTM D256
Hardness	Nominal Value Unit	Test Method
Rockwell Hardness (R-Scale)	108	ASTM D785

Notes

¹ Typical properties: these are not to be construed as specifications.

Corporate Offices: 400 Skokie Boulevard, Suite 600
Northbrook, IL 60062
800.872.7370
In Illinois: 847.272.7370
Customer Service FAX: 847.272.7713



UL and the UL logo are trademarks of UL LLC ©, 2018. All Rights Reserved. [UL PROSPECTOR](#)

The information presented on this datasheet was acquired by UL IDES from the producer of the material. UL IDES makes substantial efforts to assure the accuracy of this data. However, UL IDES assumes no responsibility for the data values and strongly encourages that upon final material selection, data points are validated with the material supplier.



Freshness and Protection
for Today's Packaging

FoilSeal™ Technical Data Sheet

S70 FS 5-9

Revision: FS59-08192011

Product	S70 FS 5-9														
Scope	One piece foam backed universal heat induction foil innerseal that will seal to all container materials with varying degrees of adhesion.														
Composition	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>Backing</td> <td>.007"</td> <td>.1778mm</td> </tr> <tr> <td>Foil</td> <td>.001"</td> <td>.0254mm</td> </tr> <tr> <td>Heat Seal</td> <td>.001"</td> <td>.0254mm</td> </tr> </tbody> </table>	Material	Standard	Metric	Backing	.007"	.1778mm	Foil	.001"	.0254mm	Heat Seal	.001"	.0254mm		Composition does not include adhesive, resin or wax bonding layers (if any).
Material	Standard	Metric													
Backing	.007"	.1778mm													
Foil	.001"	.0254mm													
Heat Seal	.001"	.0254mm													
FDA Status: 21 CFR 177.1210	Recommended Storage and Handling: Refer to Website.														
Drug Master File (DFM): #4544	EU / EP Reg.: Does not meet Article 3a of Reg. No. 2023/2006 and Article 3 of Reg. No. 1935/2004.														
GTR Oxygen: Essentially zero	MVTR: Essentially zero														
Sealing to glass containers: Selig can not guarantee the performance or seal integrity of this materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.															
Print Location (if any): Heat Seal Layer and/or Backing															

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

Recommended for use with dry food products. Is not suitable for use with fatty or alcoholic food types per ECC Reg. № 10/2011. Determining specific organoleptic compatibility per Article 3a of ECC Reg. № 2023/2006 is the responsibility of the food packager.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

Corporate Headquarters
Selig Sealing Products, LLC
342 E. Wabash St.
Forrest, IL 61741, USA
Phone: +1 (815) 785-2100
Fax: +1 (815) 657-7584

North American Sales
Selig Sealing Products, LLC
2132 Deep Water Lane
Naperville, IL 60564, USA
Phone: +1 (630) 922-3158
Fax: +1 (630) 922-8469

European Manufacturing & Sales
Selig Europe
Greenock Road Trading Estate
Slough, Berkshire SL1 4QQ, UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canadian Manufacturing
Selig Canada, ULC
145 Edward Street
Aurora, Ontario Canada, L4G 1W3
Phone: +1 (905) 727- 0114
Fax: +1 (905) 727-8544

www.seligsealing.com

