
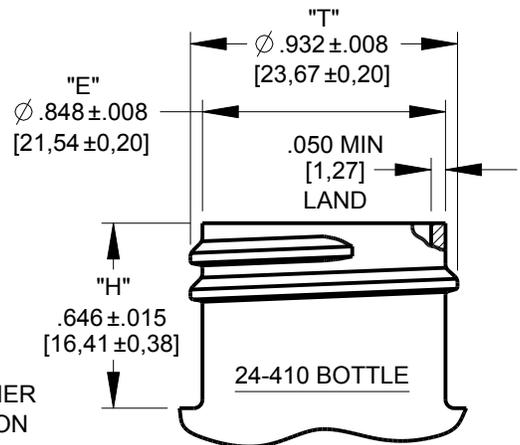


POSSESSION OF THIS DRAWING IS AN ACKNOWLEDGEMENT THAT IT AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF APTAR. THE ARTICLE SHOWN ON THIS DRAWING OR THE DRAWING MAY NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT WRITTEN PERMISSION FROM APTAR.

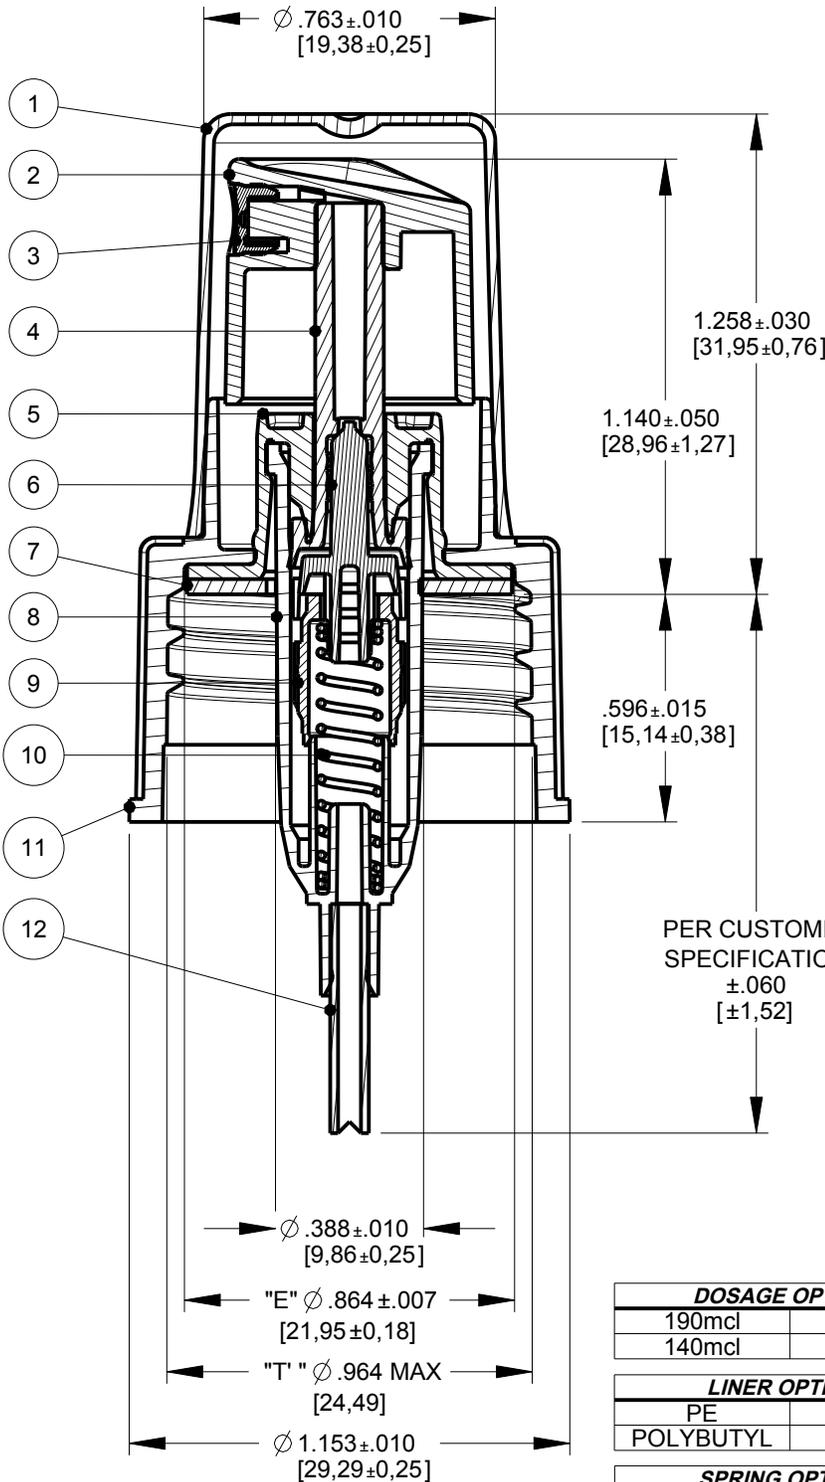

RECOMMENDED NECK FINISH  
LAND MUST BE SMOOTH AND FREE OF NICKS OR RAGGED EDGES.  
"M" STYLE THREAD WITH 8 T.P.I.

**CLOSURE NOTES:**

1. APPLICATION TORQUE: 10-18 IN. LBS
2. "T" & "E" ARE THE AVERAGE OF 2 MEASUREMENTS TAKEN APPROXIMATELY 90° APART
3. "T" IS TAKEN TOWARD THE BOTTOM OF THE CLOSURE JUST BELOW THE START OF THE FULL THREAD
4. THE "E" DIAMETER IS TAKEN AS CLOSE TO THE INSIDE DECK AS POSSIBLE

DOSAGE OPTIONS	
190mcl	160mcl
140mcl	90mcl
LINER OPTIONS	
PE	EVA
POLYBUTYL	F-217
SPRING OPTIONS	
SS	NITRONIC

No.	Part Name	Mat'l
1	HOOD	PP
2	ACTUATOR	PP
3	INSERT	ACETAL
4	PISTON	PE
5	TURRET	PP
6	POPPET	PE
7	LINER	SEE TABLE
8	BODY	PP
9	SEAL VALVE	PE
10	SPRING	SEE TABLE
11	CLOSURE	PP
12	DIPTUBE	PE

1 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS  
2 TOLERANCE FOR ORIFICES LESS THAN .060" [1,52 MM] DIA.: ±.002" [0,05 MM]  
3 ALL OTHER TOLERANCES ±.005" [0,13 MM] UNLESS OTHERWISE SPECIFIED

Title **EUROMIST®, STANDARD SPRAY ACTUATOR, CLASSIC™, 24-410 RIBBED CLOSURE**



Approved / Date  
Quality  
Expert Center  
Applications

Drawn By KES Date 25-Feb-00 Checked By / Date

Material **SEE TABLE**

Scale **2:1**

Dwg No. **CSX-0022-024**

Rev Ltr **A**