

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO POLY-TAINER / CMD INC. NO PORTION OF IT SHALL BE RELEASED, DISCLOSED, USED, OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES WITHOUT OUR PRIOR WRITTEN CONSENT.

Notes:


All dimensions and capacities before deco and oven dry.
Final dimensions and capacities from production samples.

Label area subject to label type and application equipment.

Undimensioned surfaces and surface contours derived from 3-Dimensional data base.

Illustrated Push-Up is for volume calculations only. Actual Push-Up design to be determined by tool vendor.

Revisions

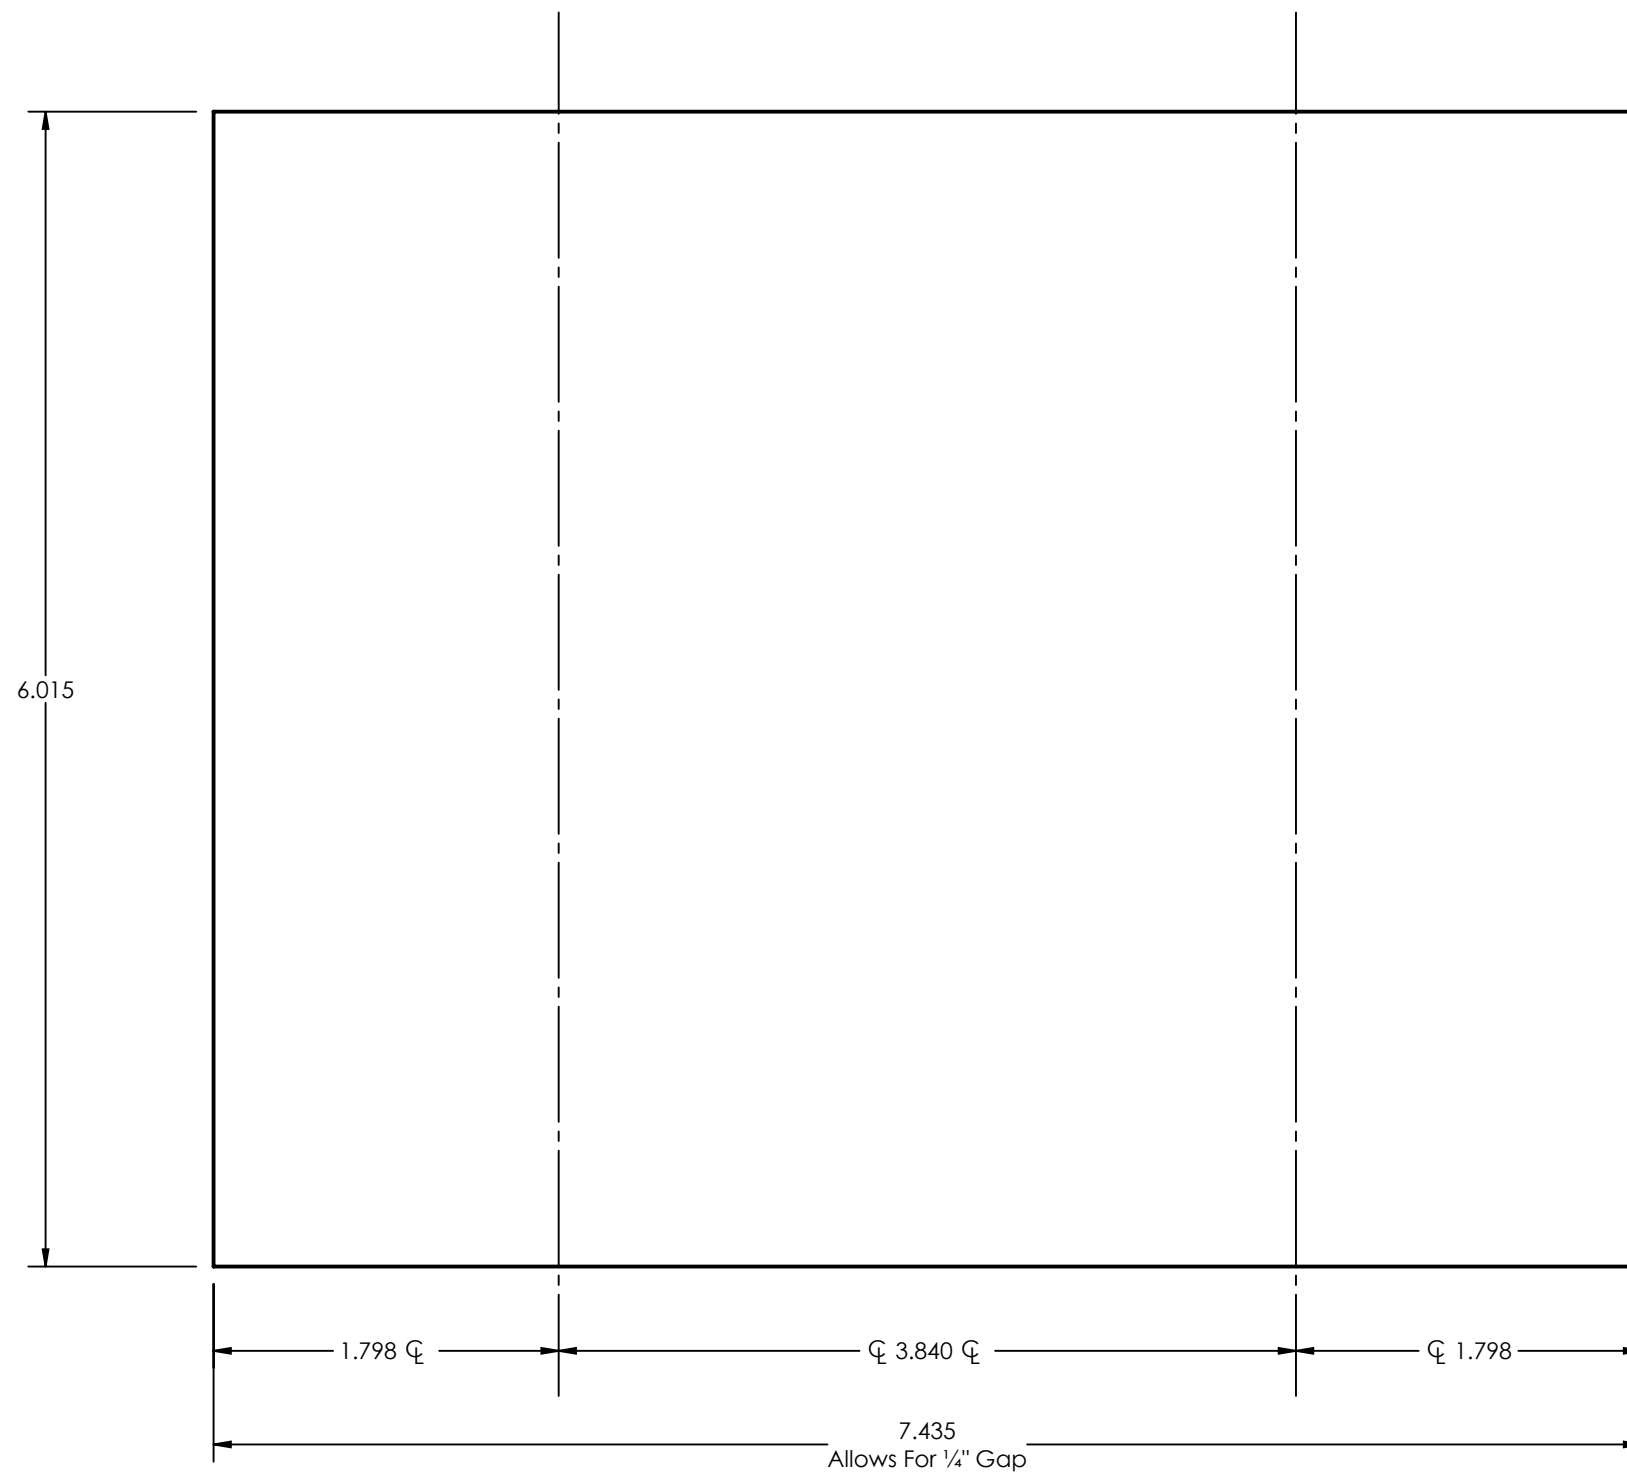

Maximum recommended label area per
OMSO North America specifications for
NOVAX M equipment

DATE	8-2-2013	DESCRIPTION
DRAWN BY	F.P.C.	16 oz. PET MCR Mold# 160-40
FILE NAME	16oz PET_MCR_160-40	CAPACITY
		484.1mL BON
TOLERANCE	S.P.I.	WEIGHT
		38gr $\pm .8$
REV		O.F.C.
		490.6mL ± 11
		FINISH
		M28SP410
		SCALE
		1:1
		MATERIAL
		PET



450 West Los Angeles Avenue, Simi Valley CA 93065
(805) 526-3424 FAX (805) 526-3430
999 Gerdt Court, Unit C, Greenwood IN 46143
(317) 883-2072 FAX (317) 883-2077