

110-400 SM

Smooth Side Wall
Smooth Top
Continuous Thread
110mm Diameter
400 Thread Profile
Lined or Unlined



OPTIONS

- Available in standard or custom colors
- Low minimum order quantities, safety stock program available
- High speed lining capabilities with a variety of lining materials including heat induction, foam and pressure sensitive
- Round or tri-tab easy-open liners
- Industry's best lead times

SHIPPING INFORMATION

- Carton quantity: 270
- Carton packing: Tumble
- Pallet quantity: 8,100
- Truckload quantity: 243,000
- Carton weight (lbs): 15.5
- Pallet weight (lbs): 485
- Carton size: 24x16x14"
- Pallet size: 40x48x91"
- Freight class: 150

STANDARD OR CUSTOM COLORS



PMS 185



PMS 3435



PMS 662C



PMS 2685



PMS 1665



PMS 10388



BLACK




WHITE



PMS 110C

110-400 SM

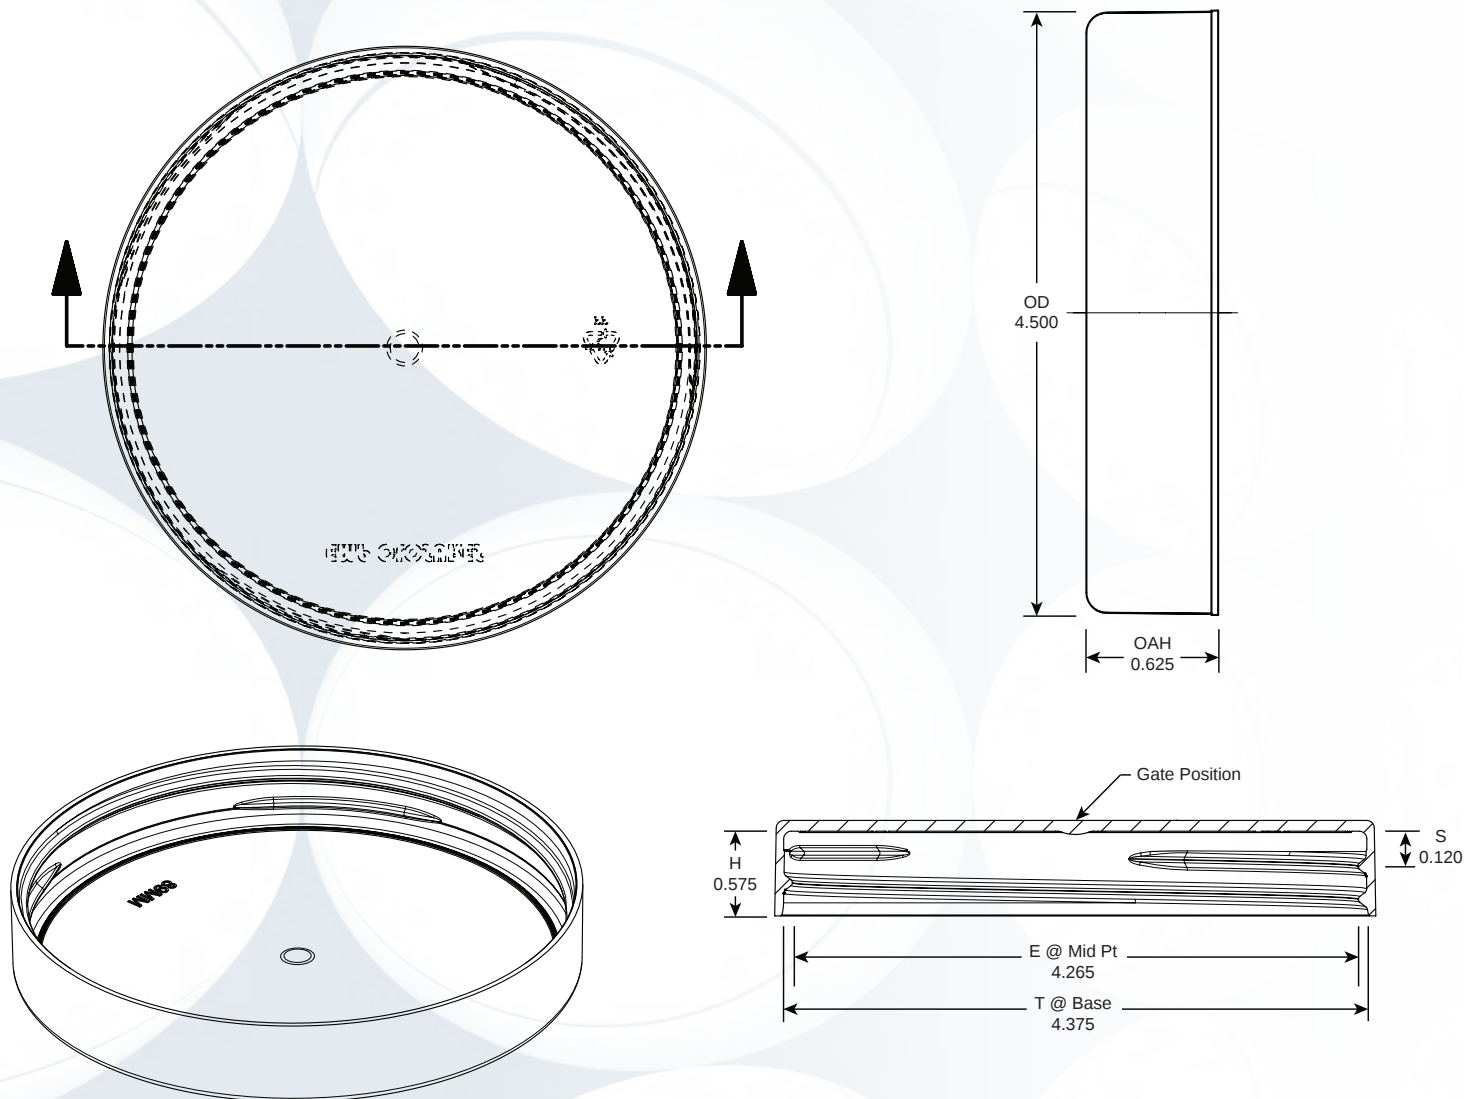

- Country of Origin is the USA and Manufacturing location is Erie, PA
- To maintain the quality of this product, it is recommended that product should be stored in its original packaging; away from any source of local heating and humidity; away from direct sunlight; under 30°C and dry conditions. It is recommended to allow product to reach operating temperature 24 hours before use.
- Products must be used within 12 months from the production date. Stocks should be in rotation so that first delivery is used first and last delivery is used last.


Inch tolerances (unless specified) General: +/- .010 "/>		 6020 West Ridge Road Erie, Pennsylvania 16506 (814) 838-7914 Fax (814) 838-7411	
Number of turns: 1.25			
Pitch (TPI): 5	Max Deck Dip: 0.150	110-400 SM	
Material: PP		Erie Molded Packaging, Inc.	
This drawing is the exclusive property of Erie Molded Packaging, Inc. and may not be reproduced without the expressed written consent of Erie Molded Packaging, Inc.		Date: November 21, 2016	Sheet: 01 of 01

HSP-3.1/10

- HSP-3.1/10 is a one-piece, paper backed, induction heat seal that gives a clean peel bond to Polyester (PET) & Vinyl (PVC) containers.
- Available with standard or custom print.

Typical Product Attributes

Construction

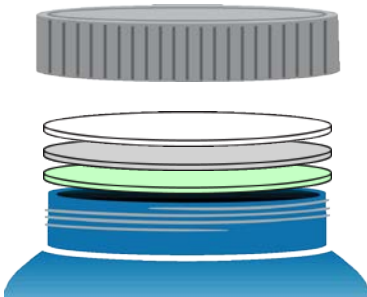Paper Aluminum Foil Heat Seal Tolerance Thickness Minimum Width Width Tolerance		SI (µm)	US (Mils)
		254,0 12,7 12,7 ± 10% 25,4 mm ± 1,6 mm	10.0 0.5 0.5 ± 10% 1.0 inch ± 0.0625 inch

Properties

Water Vapor Transmission (WVTR)	Essentially Zero
Gas (O ₂ , CO ₂ & Others) (GTR)	Essentially Zero

Regulatory Compliance

FDA Compliance	21 CFR 177.1630 Polyethylene phthalate polymers. 21 CFR 177.1210 Closures with sealing gaskets for food containers 21 CFR 176.180 Components of paper and paperboard in contact with dry foods. 21 CFR 176.170 Components of paper and paperboard in contact with aqueous and fatty foods.
Drug Master File (DMF)	14762
Other Compliances	USFDA Food Allergen Guidelines; California Proposition 65 Labeling Requirements; Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11

Original Date: 2003-05-02
 Revised Date: 2016-08-25
 Revision Number: 2
 Created by PEY