

# 89-400 RB

Ribbed Side Wall

Matte Top

Continuous Thread

89mm Diameter

400 Thread Profile

Lined or Unlined



## OPTIONS

- Available in standard or custom colors
- Low minimum order quantities, safety stock program available
- High speed lining capabilities with a variety of lining materials including heat induction, foam and pressure sensitive
- Round or tri-tab easy-open liners
- Industry's best lead times

## SHIPPING INFORMATION

- Carton quantity: 656
- Carton packing: Stacked
- Pallet quantity: 16,400
- Truckload quantity: 492,000
- Carton weight (lbs):  
Lined: 22.4    Unlined: 20.5
- Pallet weight (lbs)  
Lined: 611    Unlined: 563
- Carton size: 23x15x15"
- Pallet size: 40x48x81"
- Freight class: 150

## STANDARD OR CUSTOM COLORS



RED  
PMS 185



ORANGE  
PMS 1665



YELLOW  
PMS 110



GOLD  
PMS 871



GREEN  
PMS 2418



GREEN  
PMS 3435



BLUE  
PMS 662



BLUE  
PMS 285



PURPLE  
PMS 2685



SILVER  
PMS 8001

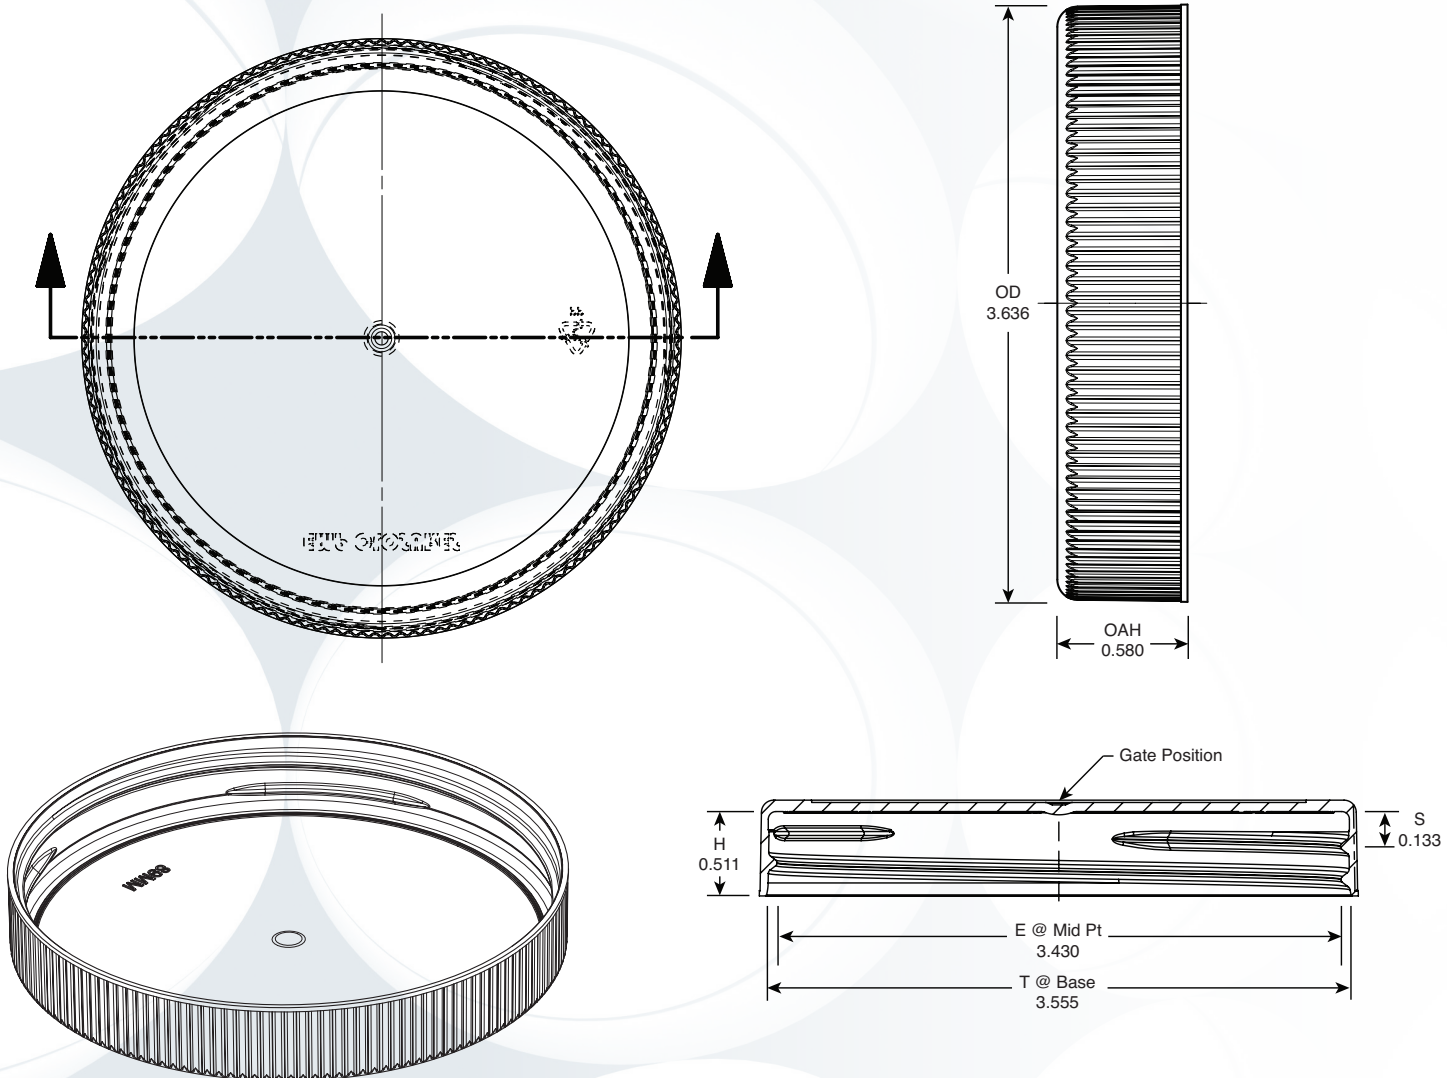


BLACK





WHITE

**89-400 RB**



- Country of Origin is the USA and Manufacturing location is Erie, PA
- To maintain the quality of this product, it is recommended that product should be stored in its original packaging; away from any source of local heating and humidity; away from direct sunlight; under 30°C and dry conditions. It is recommended to allow product to reach operating temperature 24 hours before use.
- Products must be used within 12 months from the production date. Stocks should be in rotation so that first delivery is used first and last delivery is used last.

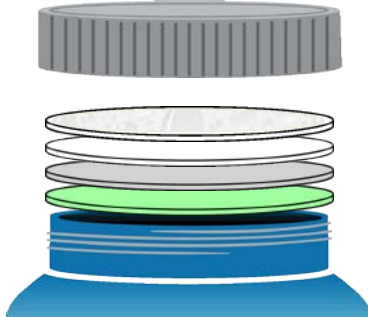
Inch tolerances (unless specified) General: +/- .010 “/”	 6020 West Ridge Road Erie, Pennsylvania 16506 (814) 838-7914 Fax (814) 838-7411	
Number of turns: 1.25		
Pitch (TPI): 5	89-400 RB	
Material: PP	Erie Molded Packaging, Inc.	
This drawing is the exclusive property of Erie Molded Packaging, Inc. and may not be reproduced without the expressed written consent of Erie Molded Packaging, Inc.	Date: November 21, 2016	Sheet: 01 of 01

## HS 035 HEAT SEAL/20F

- Designed as a one-piece, polystyrene backed, induction heat seal with an ethylene vinyl acetate based sealant layer that gives a tamper evident bond to Polyethylene (PE), Polypropylene (PP), Polyester (PET), Polystyrene (PS), Vinyl (PVC) and glass containers.
- Available with standard or custom print.

### Typical Product Attributes

#### Construction

Polystyrene Foam Paper Aluminum Foil Heat Seal		SI (µm)	US (Mils)
		508,0	20.0
		71,1	2.8
		8,9	0.35
		63,5	2.25
Minimum Width Width Tolerance		25,4 mm ± 1.6 mm	1.0 inch ± 1/16

#### Properties

Water Vapor Transmission (WVTR)	Essentially Zero
Gas (O <sub>2</sub> ) (GTR)	Essentially Zero

#### Regulatory Compliance

FDA Compliance	21 CFR 177.1640 Polystyrene and rubber-modified polystyrene. 21 CFR 177.1350 Ethylene-vinyl acetate copolymers. 21 CFR 177.1210 Closures with sealing gaskets for food containers 21 CFR 176.180 Components of paper and paperboard in contact with dry foods. 21 CFR 176.170 Components of paper and paperboard in contact with aqueous and fatty foods.
Drug Master File (DMF)	2518
Other Compliances	USFDA Food Allergen Guidelines; California Proposition 65 Labeling Requirements; Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11

Original Date: 2016-03-25  
 Revised Date: N/A  
 Revision Number: 0  
 Created by PEY

**DISCLAIMER:** This information is believed to be accurate at the time of printing and is subject to change without notice. Providing this information does not convey any licenses under any patent rights or intellectual property rights of Tri-Seal or others. TRI-SEAL MAKES NO WARRANTY, EXPRESS OR IMPLIED, WITH RESPECT TO THIS INFORMATION AND DISCLAIMS ALL LIABILITY FROM RELIANCE ON IT. Tri-Seal's only warranties for this product are those written warranties as may be agreed to by Tri-Seal and its customers. TRI-SEAL SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.

Tri-Seal  
 a Tekni-Plex company  
 16125 Armour St. N.E.  
 Alliance, OH 44601  
 Tel: 330-821-1166 – Fax: 330-821-0364  
 www.tri-seal.tekni-plex.com