


RECOMMENDED CONTAINER DATA


SPEC. No: S-120-400-08

THREAD DATA

- 1.) 120SP400 FINISH
- 2.) MIN 2 TURNS THREAD
- 3.) 5 T.P.I. - .200 PITCH
- 4.) M OR L THREAD STYLE

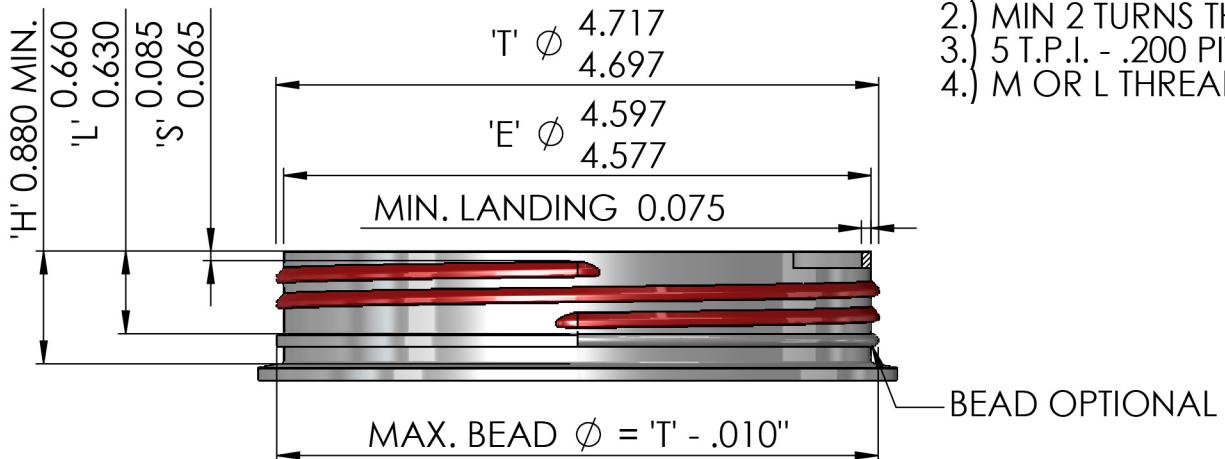

CAP DATA

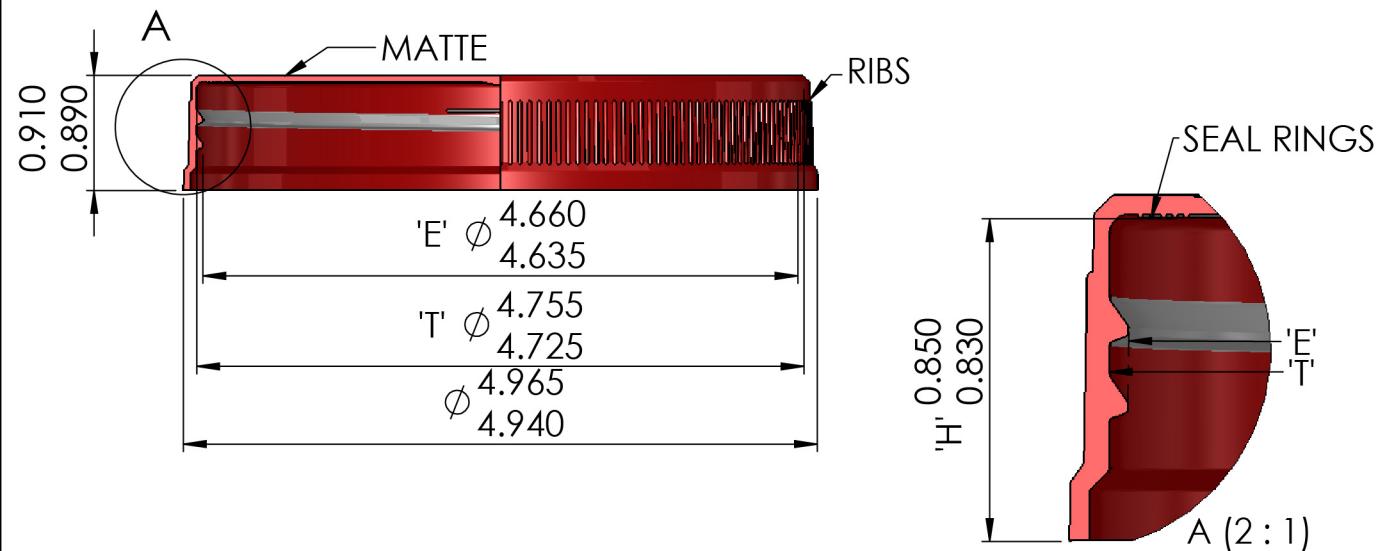

CAP SIZE: 120 MM

MATERIAL: POLY PRO

WEB DRAWING

DATE: 1/11/2011

PART DESCRIPTION: 120MM RIBBED MATTE DEEP SKIRT TAPER STACK CAP

SPECIFICATION No: S-120-400-08

rieke

Innovative Molding, Incorporated
1200 Valley House Dr. Ste 100 Rohnert Park, CA 94928
Phone: (707) 238-9250 Fax: (707) 238-9264

COMPILED BY: DAW

DRAWN BY: CSF

REV: A

STOCK #: C-120-7 A



Freshness and Protection for Today's Packaging

FoilSeal™ Technical Data Sheet

.008" C1S FS 5-10

Revision: FS510-08272014

Product	.008" C1S FS 5-10		
Scope	One piece board backed heat induction foil innerseal which combines ease of removal with tamper-evident properties. It will seal to all, standard container materials and will allow internal pressure to vent through the paper layer.		
Composition	Material	Standard	Metric
	Backing	.008"	.2032 mm
	Foil	.001"	.0254 mm
	Paper	.005"	.127 mm
	Heat Seal	.0015"	.0381 mm
			Adhesive or resin bonding layers not shown.
FDA Status: 21 CFR 177.1210	Recommended Storage and Handling: Refer to Website.		
Drug Master File (DMF): #4544	EU / EP Reg.: Does not meet Article 3a of Reg. No. 2023/2006 and Article 3 of Reg. No. 1935/2004.		
GTR Oxygen: 122.1 cc Oxygen/100 IN2 * 24hrs. @ 100° F, ASTM F-2622-08	MVTR: 1.52 gm water/100IN2 * 24 hrs. @ 75° F, ASTM F-1249		
Print Location: Heat Seal Layer and/or Backing			
Sealing to glass containers: Selig can not guarantee the performance or seal integrity of this materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.			

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

Recommended for use with dry food products. Is not suitable for use with fatty or alcoholic food types per ECC Reg. № 10/2011. Determining specific organoleptic compatibility per Article 3a of ECC Reg. № 2023/2006 is the responsibility of the food packager.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.

www.seligsealing.com

Corporate Headquarters North American Sales
Selig Sealing Products, Inc. Selig Sealing Products, Inc.
342 E Wabash St 184 Shuman Blvd., Suite 310
Forrest, IL 61741, USA Naperville, IL 60563, USA
Phone: +1 (815) 785-2100 Phone: +1 (630) 922-3158
Fax: +1 (815) 657-7584 Fax: +1 (630) 922-8469

European Sales and Manufacturing
Selig UK, LTD 635-637 Ajax Avenue
Slough Trading Estate
Slough Berkshire SL14BH UK
Phone: +44 (0) 1753 773 000
Fax: +44 (0) 1753 773 111

Canadian Manufacturing
Selig Canada, ULC
145 Edward Street
Aurora, Ontario Canada, L4G 1W3
Phone: +1 (905) 727-0114
Fax: +1 (905) 727-8544

Swiss Manufacturing
Selig Switzerland LTD
Bahnhofstrasse 11
CH-8172 Niederglatt
Phone: +41 (0) 44 851 50 50
Fax: +41 (0) 44 851 50 51



ISO 9001:2008
10001987



ISO 9001:2008
CH1398374