




螺纹宽: 2.2mm
螺距: 5.0mm
螺纹圈数: 1.3圈

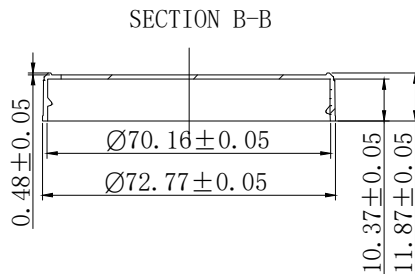

D73 X H12

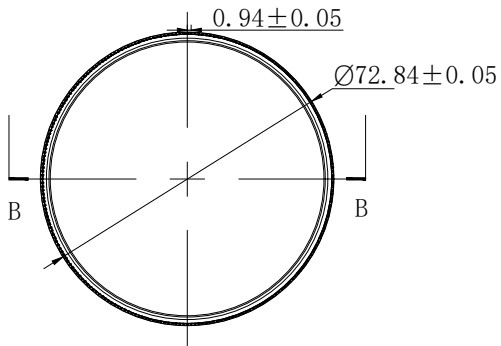

PRODUCT DATA SHEET

PRODUCT NAME: Glass Induction Liner


Product Description:

Glass liner is applied for Glass, PE, PP, PET and other material bottles (or jars) sealing by induction heating sealer. It has clean-peel feature after sealing.

Application:

Typically for food, sauce, pharmacy and daily chemical products, for example dry fruit, peanut butter, salt, cosmetic cream, and so on.

Composition:

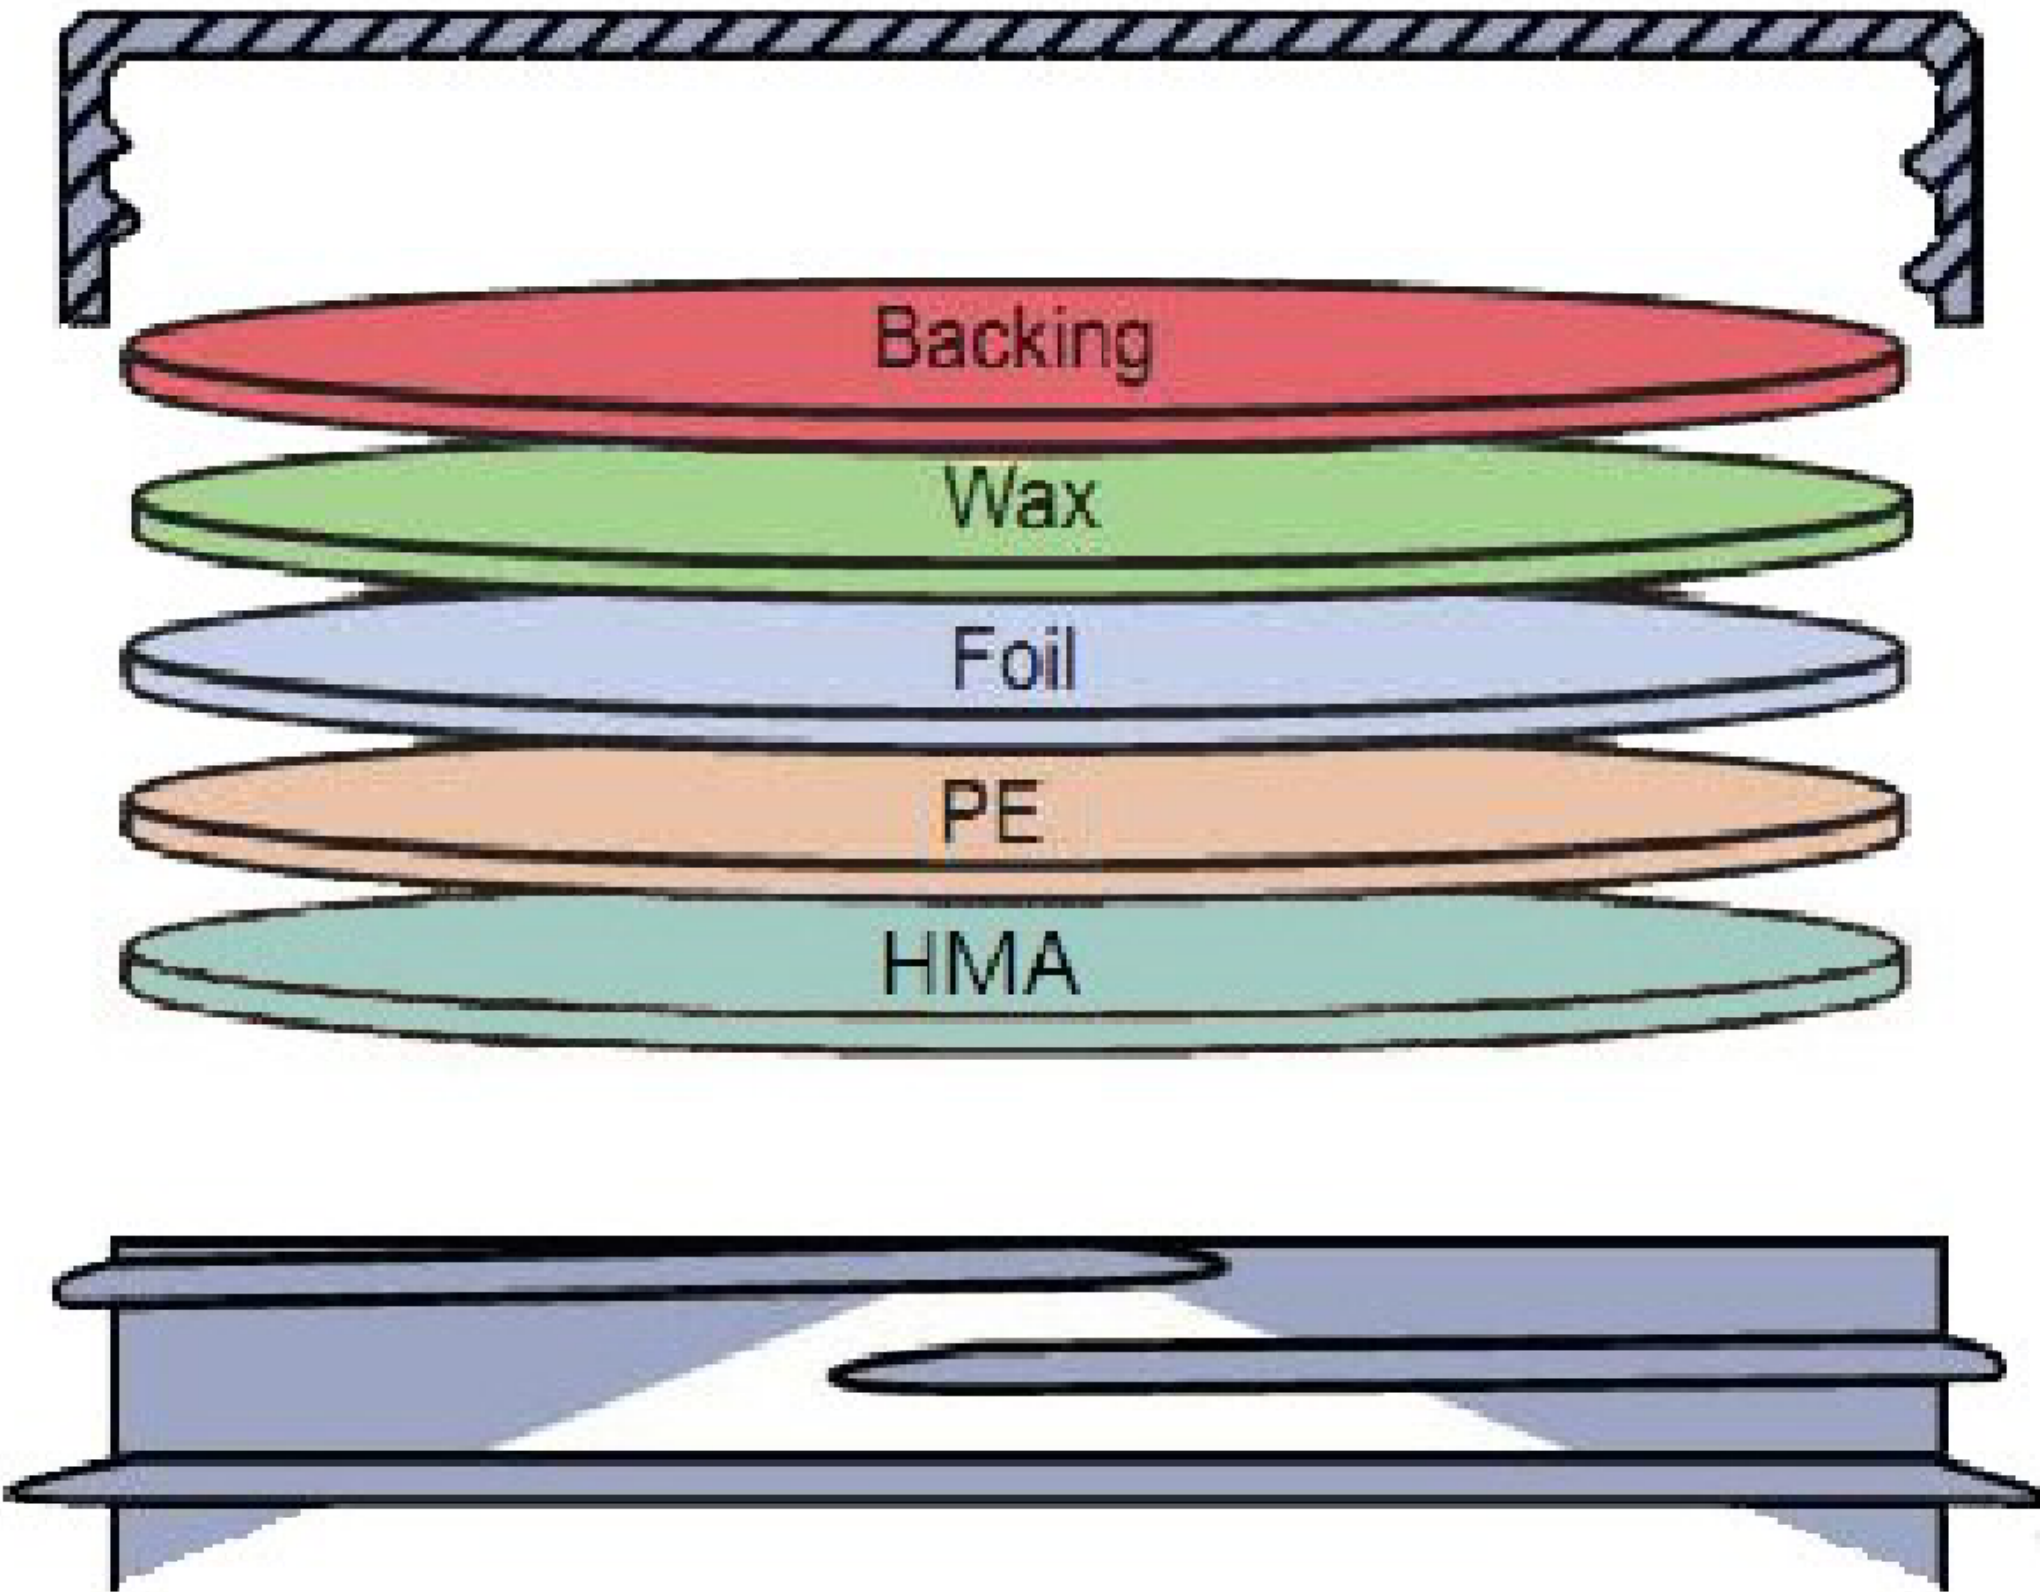Data		Figure
Layer	Thickness	
Backing (pulpboard)	0.5mm	
Wax	-	
Foil (AL)	0.02mm	
PE	0.04mm	
HMA	0.09mm	
Overall	0.65mm	

Product Value:

Odor: None detected	GTR: Near Zero
Taste: None detected	MVTR: Near Zero

Regulatory Compliance:

The glass induction liners complies with applicable Chinese Food Industry certificates regulations, for most food, beverage and pharmaceutical products.

Storage and Handling:

Transportation or storage temperature should not exceed 40°C. Avoid exposing to direct sunlight. For best results, wait 48 hours at recommended storage conditions before processing. Do not exceed 12 months of storage from manufacturing date. Recommended sealing temperature is around 130~190°C.