EMP ERIE MOLDED PACKAGING
Erie Molded Packaging • 6020 West Ridge Road • Erie, PA 16506 • 814.838.7914 • www.ErieMolded.com

70-400 CT

Smooth Side Wall
Smooth Top
Continuous Thread
70mm Diameter
400 Thread Profile
Lined or Unlined



OPTIONS

- Available in standard or custom colors
- Low minimum order quantities, safety stock program available
- High speed lining capabilities with a variety of lining materials including heat induction, foam and pressure sensitive
- Round or tri-tab easy-open liners
- Industry's best lead times


SHIPPING INFORMATION

- Carton quantity: 1,000
- Carton packing: Tumble
- Pallet quantity: 30,000
- Truckload quantity: 900,000
- Carton weight (lbs): 17.4
- Pallet weight (lbs): 505
- Carton size: 24x16x14"
- Pallet size: 40x48x91"
- Freight class: 150

STANDARD OR CUSTOM COLORS

RED PMS 185	ORANGE PMS 1665	YELLOW PMS 110	GOLD PMS 871
GREEN PMS 2418	GREEN PMS 3435	BLUE PMS 662	BLUE PMS 285
PURPLE PMS 2685	SILVER PMS 10388	BLACK	WHITE

70-400 CT

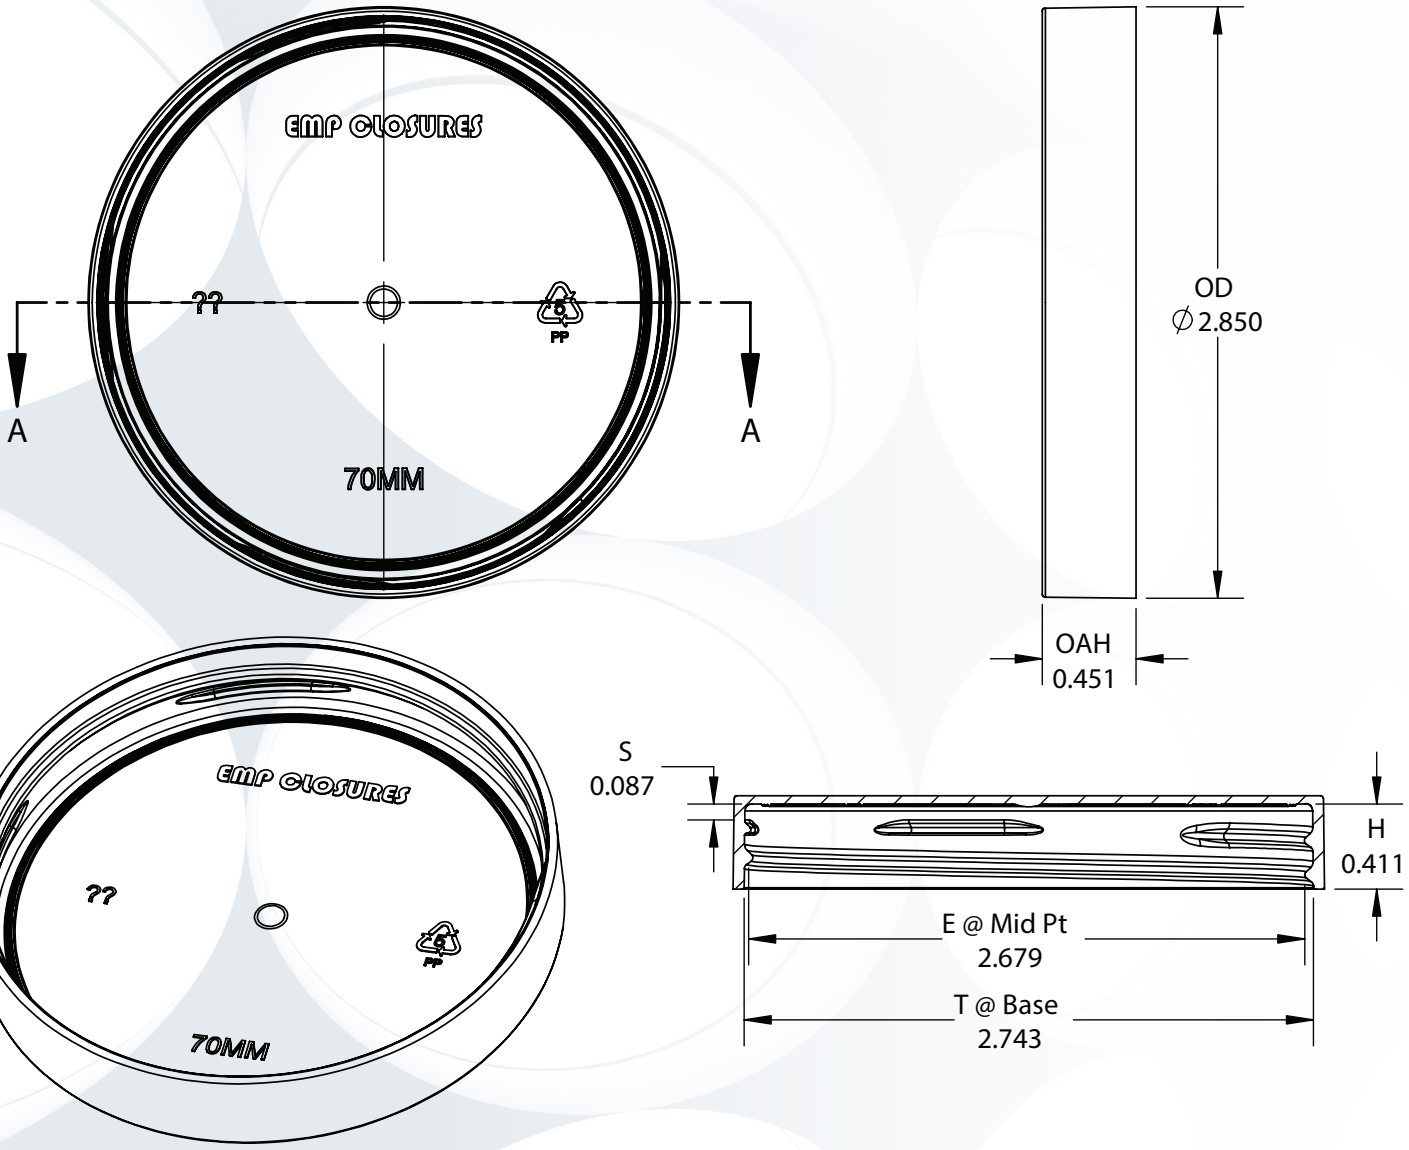

- Country of Origin is the USA and Manufacturing location is Erie, PA
- To maintain the quality of this product, it is recommended that product should be stored in its original packaging; away from any source of local heating and humidity; away from direct sunlight; under 30°C and dry conditions. It is recommended to allow product to reach operating temperature 24 hours before use.
- Products must be used within 12 months from the production date. Stocks should be in rotation so that first delivery is used first and last delivery is used last.

Inch tolerances (unless specified) General: +/- .010 "/"	EMP ERIE MOLDED PACKAGING 6020 West Ridge Road Erie, Pennsylvania 16506 (814) 838-7914 Fax (814) 838-7411	
Number of turns: 1.125		
Pitch (TPI): 6	70-400 CT	
Material: PP	Erie Molded Packaging, Inc.	
This drawing is the exclusive property of Erie Molded Packaging, Inc. and may not be reproduced without the expressed written consent of Erie Molded Packaging, Inc.	Date: February 7, 2022	Sheet: 01 of 01


TRISEAL PRODUCT DATA SHEET TEKNIPLEX Global strength. Superior solutions.

HSP-2.2/10

- HSP-2.2/10 is a one-piece, paper backed, induction heat seal that gives a clean peel bond to Polyethylene (PE) & Polypropylene (PP) containers.
- Available with standard or custom print.

Typical Product Attributes

Construction

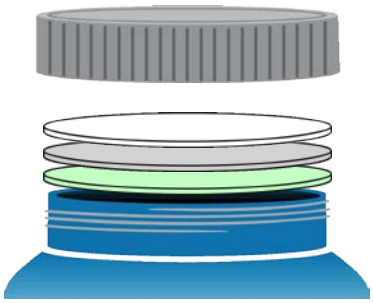

	SI (µm)	US (Mils)
Paper	254,0	10.0
Aluminum Foil	12,7	0.5
Heat Seal	38,1	1.5
Thickness Tolerance	± 10%	± 10%
Minimum Width	25,4 mm	1.0 inch
Width Tolerance	± 1,6 mm	± 0.0625 inch

Properties

Water Vapor Transmission (WVTR)	Essentially Zero
Gas (O2, CO2 & Others) (GTR)	Essentially Zero

Regulatory Compliance

FDA Compliance	21 CFR 177.1520 Olefin polymers. 21 CFR 177.1210 Closures with sealing gaskets for food containers 21 CFR 176.180 Components of paper and paperboard in contact with dry foods. 21 CFR 176.170 Components of paper and paperboard in contact with aqueous and fatty foods.
Drug Master File (DMF)	14762
Other Compliances	USFDA Food Allergen Guidelines; California Proposition 65 Labeling Requirements; Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11

Original Date: 2003-05-02
Revised Date: 2016-08-05
Revision Number: 2
Created by PEY