
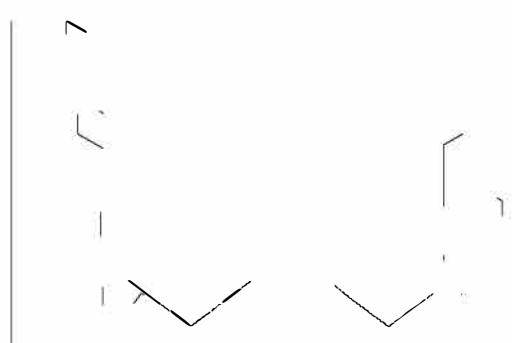


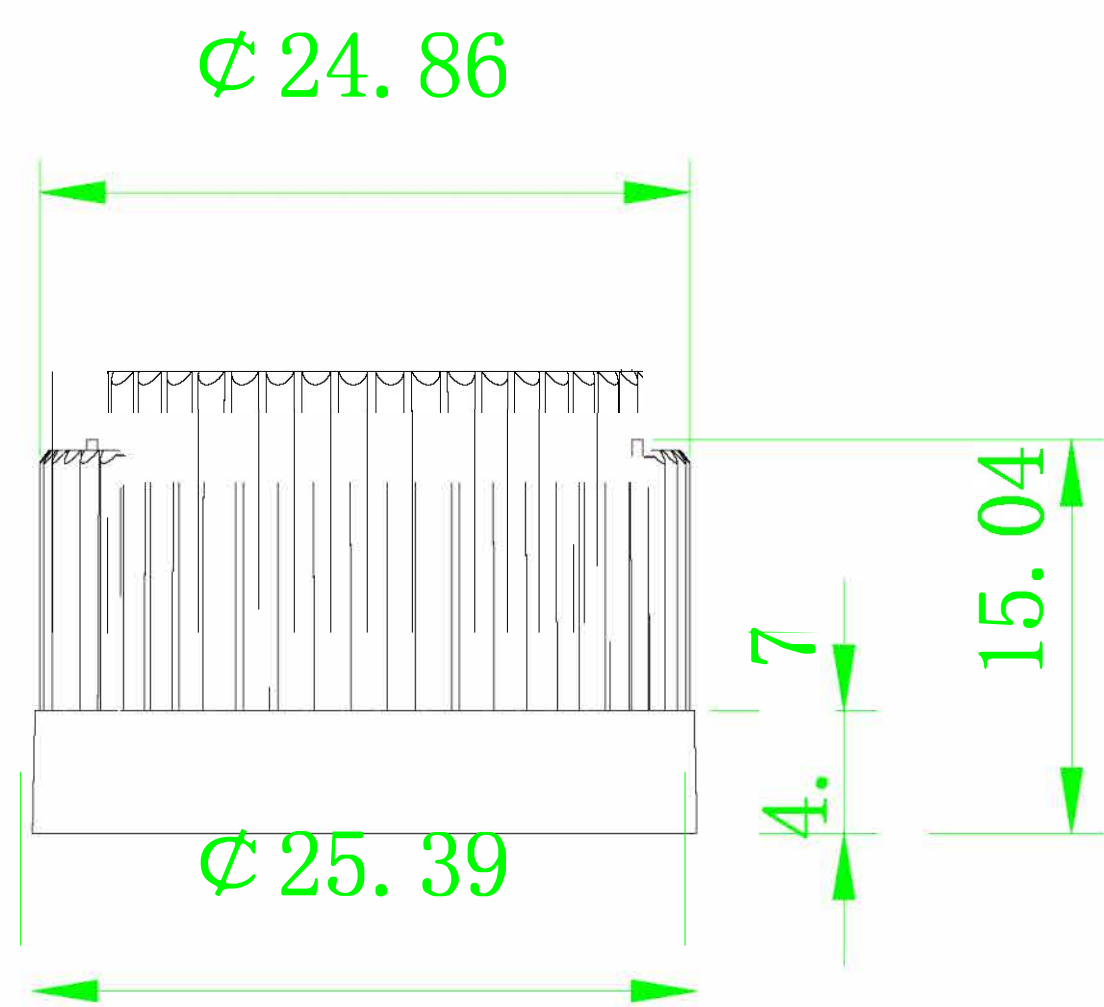

Design		日期 Date		产品系列 Product series		GB28- $\varnothing$ 20-400		制品名称 Plastic name	箭头外盖
审核 Review		日期 Date		容量 Capacity		重量 Weight	1.5g	材质 Material	PP
批准 Approval		日期 Date		单位 Unit	mm	视角 View			
纸页 Paper size	A4	版本 Version	A0	比例 Scale	1:1				

PRODUCT DATA SHEET

PRODUCT NAME: Glass Induction Liner


Product Description:

Glass liner is applied for Glass, PE, PP, PET and other material bottles (or jars) sealing by induction heating sealer. It has clean-peel feature after sealing.

Application:

Typically for food, sauce, pharmacy and daily chemical products, for example dry fruit, peanut butter, salt, cosmetic cream, and so on.

Composition:

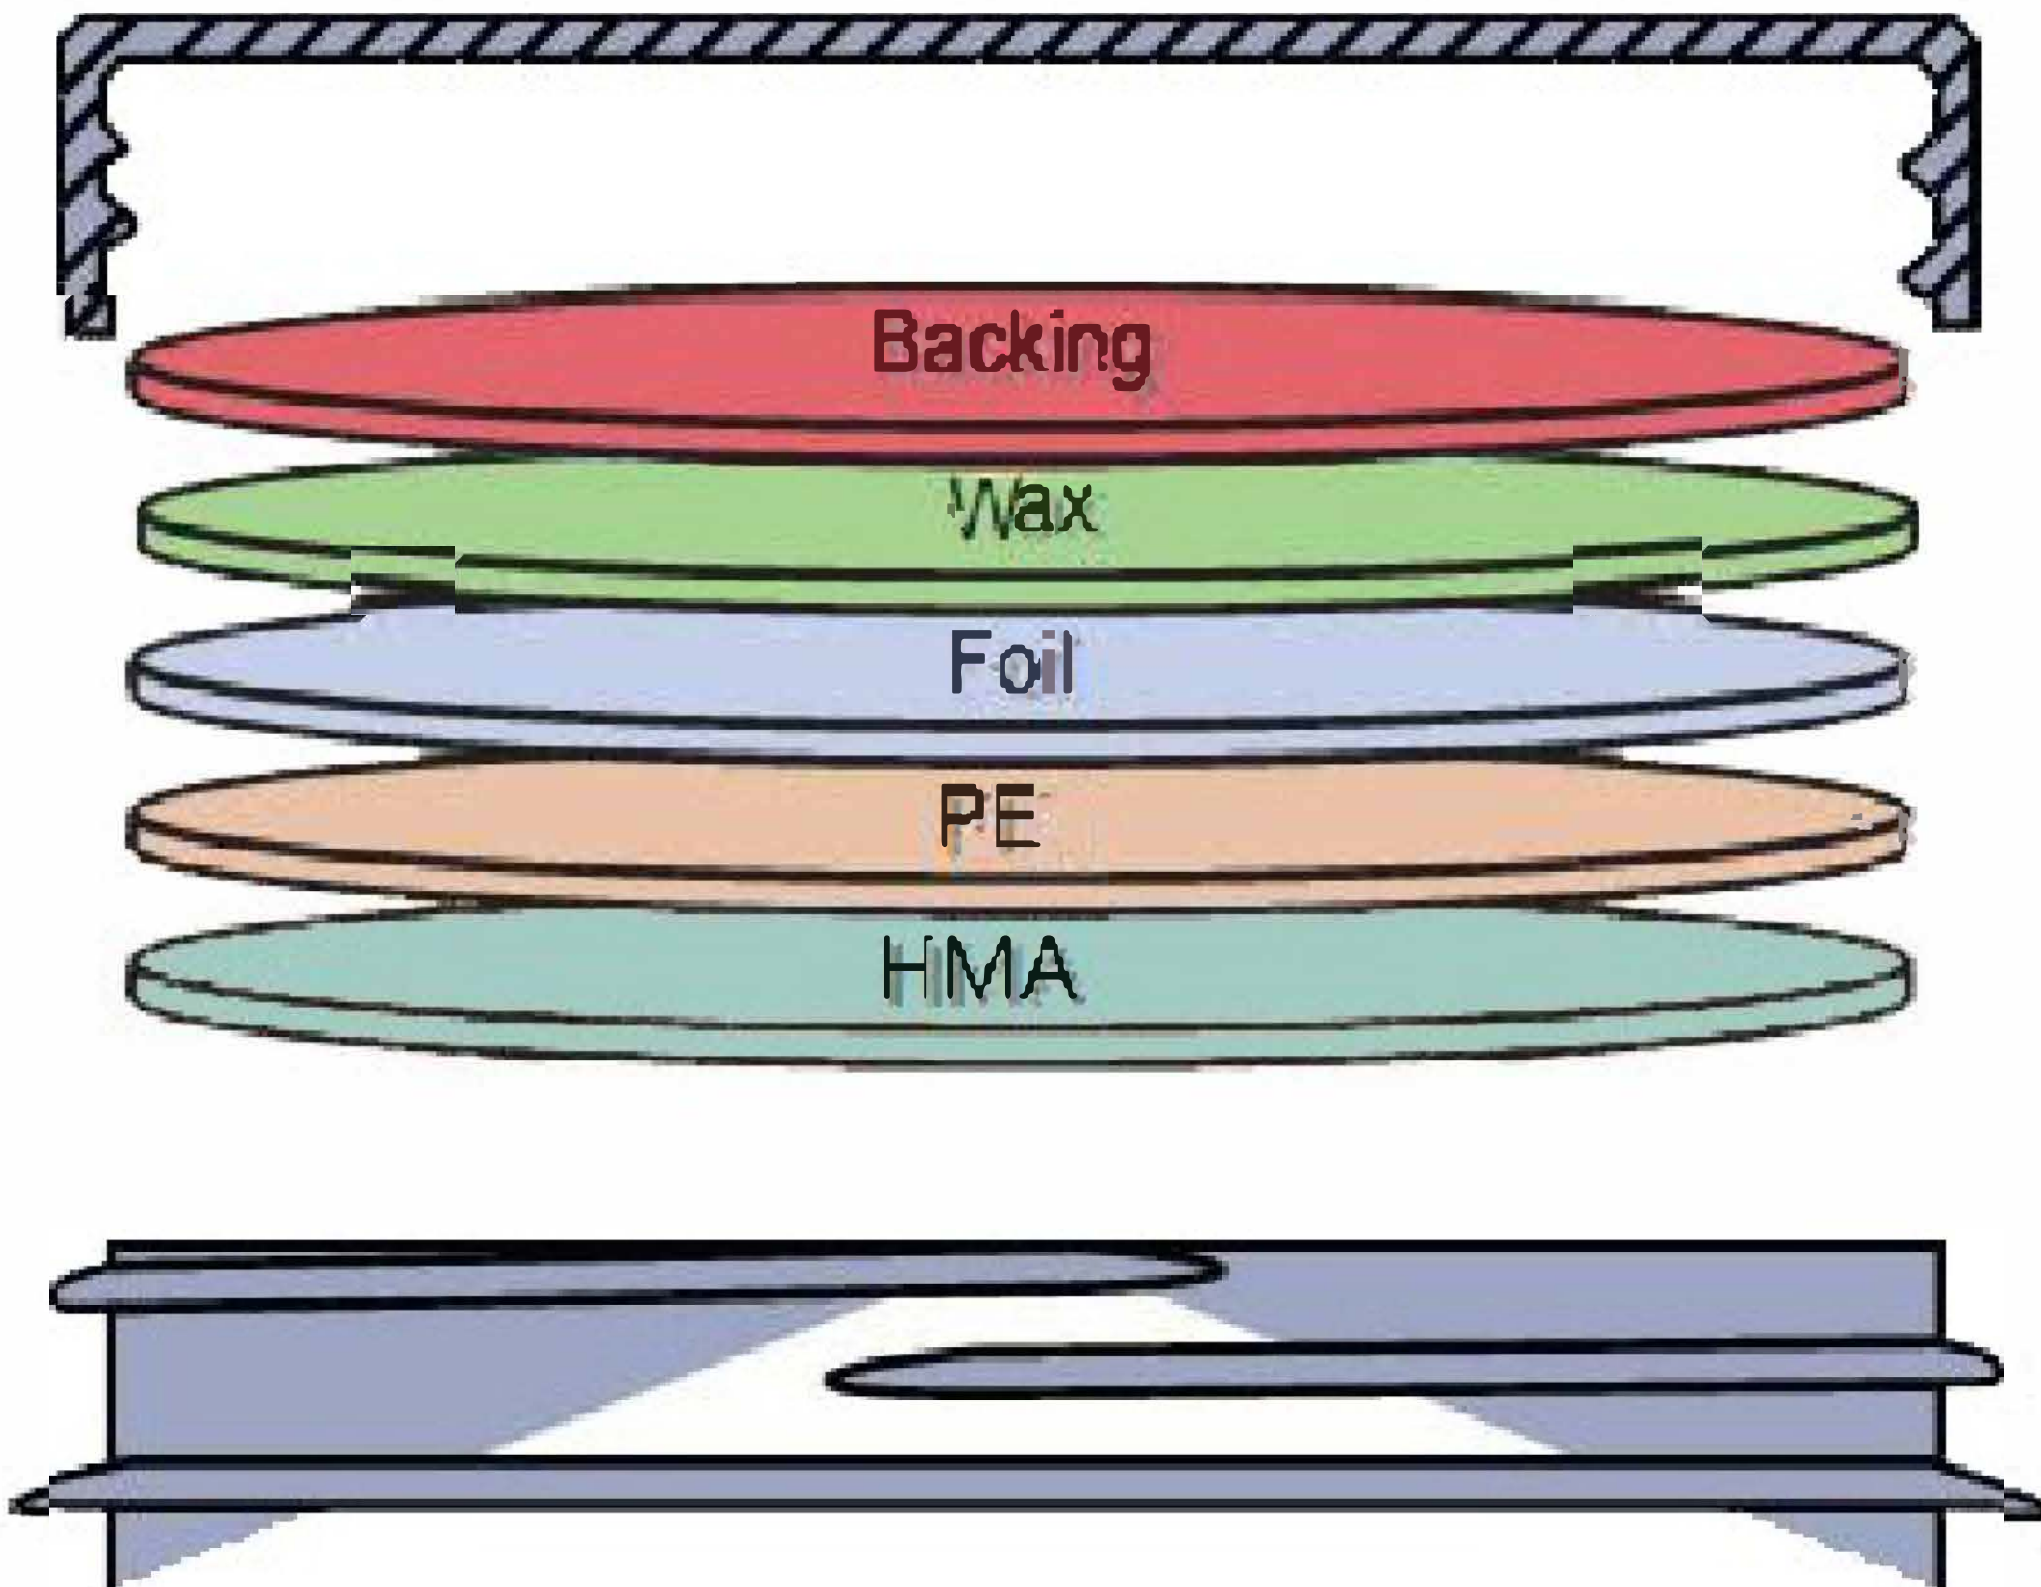Data		Figure
Layer	Thickness	
Backing (pulpboard)	0.5mm	
Wax	-	
Foil (AL)	0.02mm	
PE	0.04mm	
HMA	0.09mm	
Overall	0.65mm	

Product Value:

Odor: None detected	GTR: Near Zero
Taste: None detected	MVTR: Near Zero

Regulatory Compliance:

The glass induction liners complies with applicable Chinese Food Industry certificates regulations, for most food, beverage and pharmaceutical products.

Storage and Handling:

Transportation or storage temperature should not exceed 40°C. Avoid exposing to direct sunlight. For best results, wait 48 hours at recommended storage conditions before processing. Do not exceed 12 months of storage from manufacturing date. Recommended sealing temperature is around 130~190°C.